


Perspective View

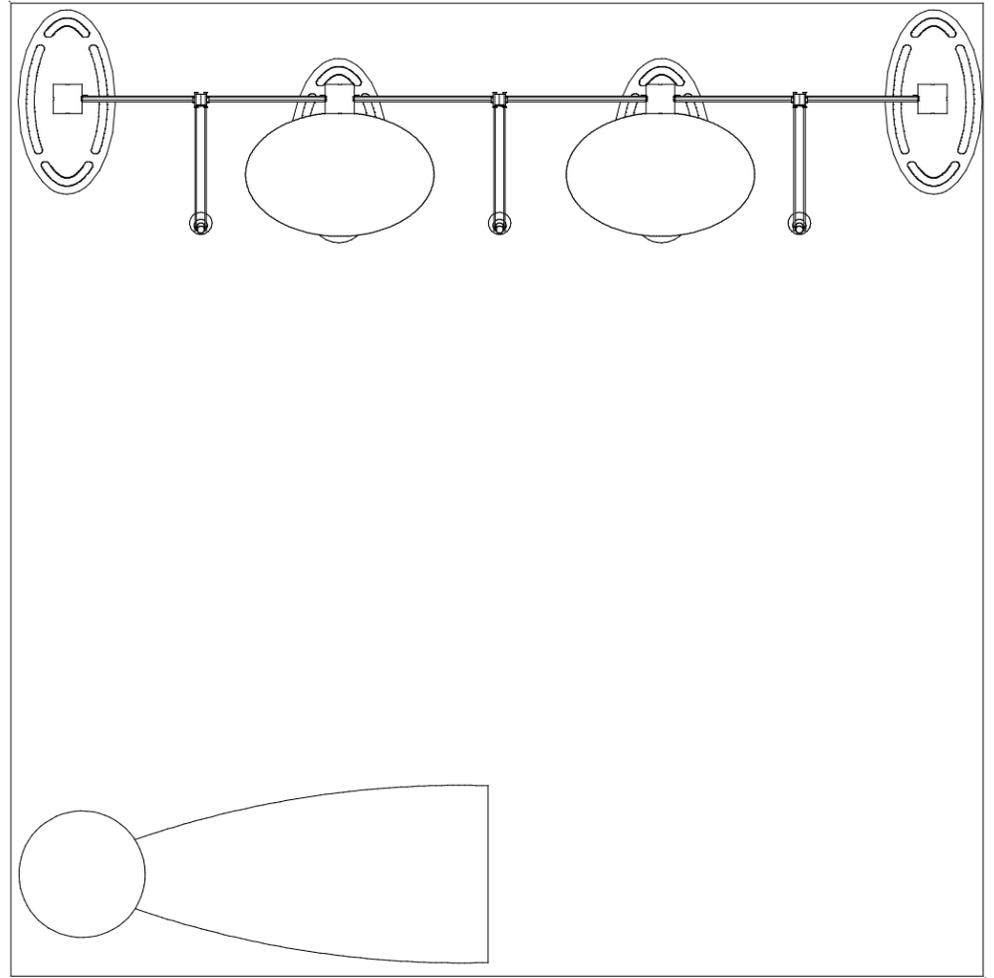

Plan View

10'

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.  
**Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

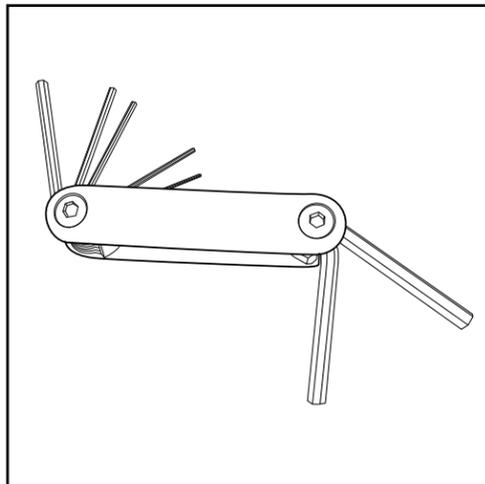


Hex Tool - Essential for Assembly

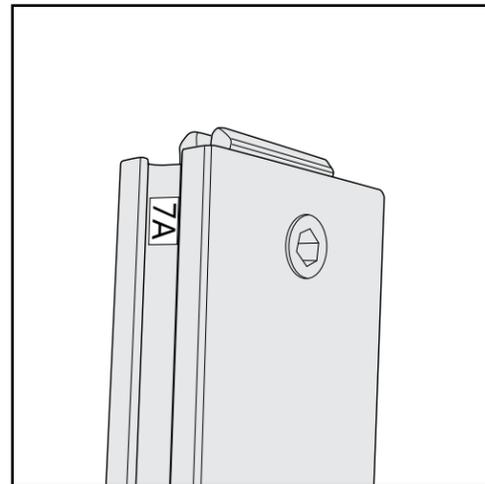


Part Identification - Numbering

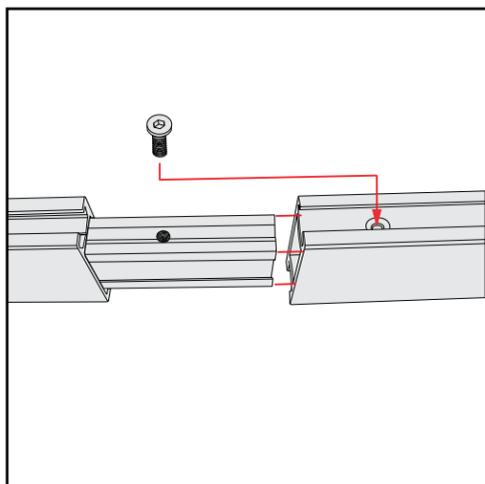


Spline Connection

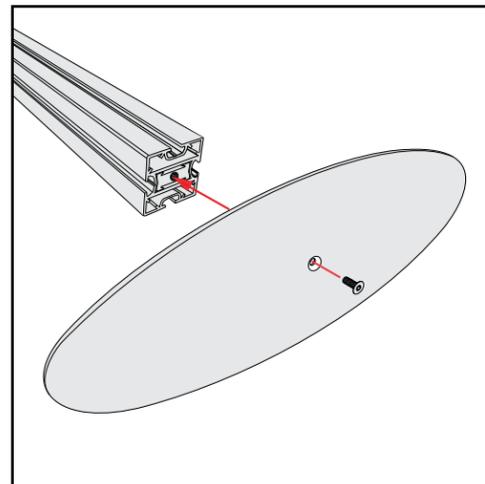

Base Plate & Extrusion Connection

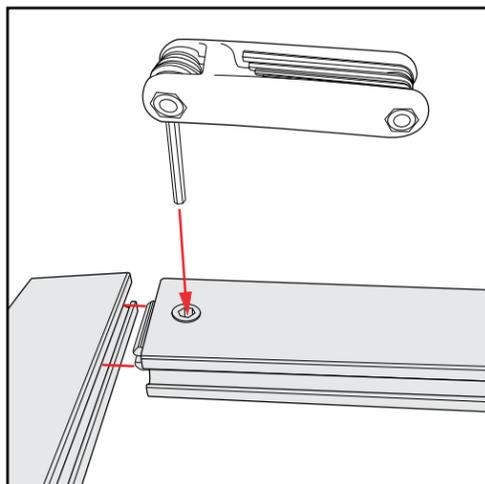

Extrusion & Lock Connection

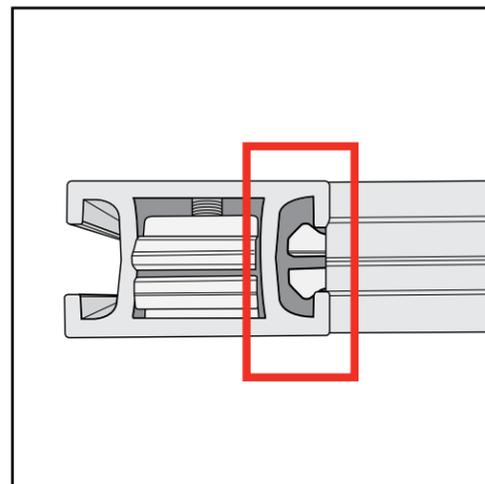

Engaged Lock



# WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS  
MAY BE REQUIRED





ALL CONNECTIONS MUST  
BE TIGHTLY SECURED

## LT Panel Assembly

- 1) With a vertical offset, place LT-Panels side-by-side; slide vertically offset panel down to lock panels together and in place.
- 2) Corner Connectors (90°, T-Connector, Straight Connector) connect just as panels connect together. Repeat Step 1 for installing corner connectors to panels.

## LT Panel Disassembly

- 1) To disassemble push panel with upper locks horizontally to disengage top lock clip.
- 2) Slide panels or connectors vertically in opposing directions to release latches and disconnect parts.

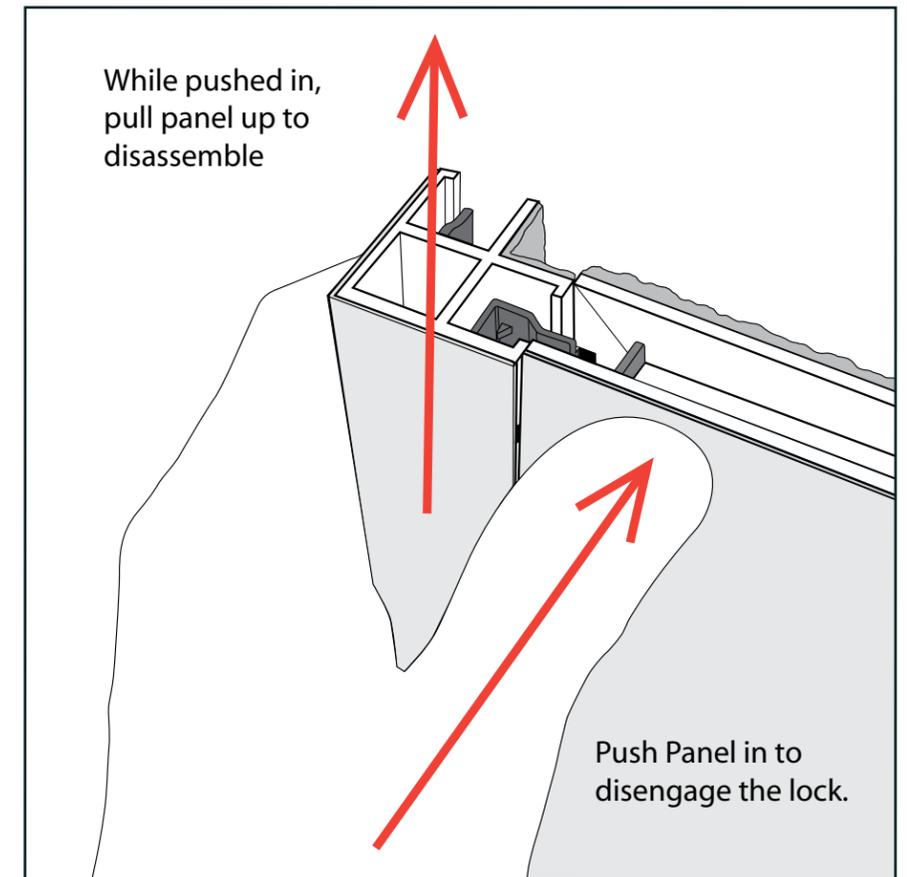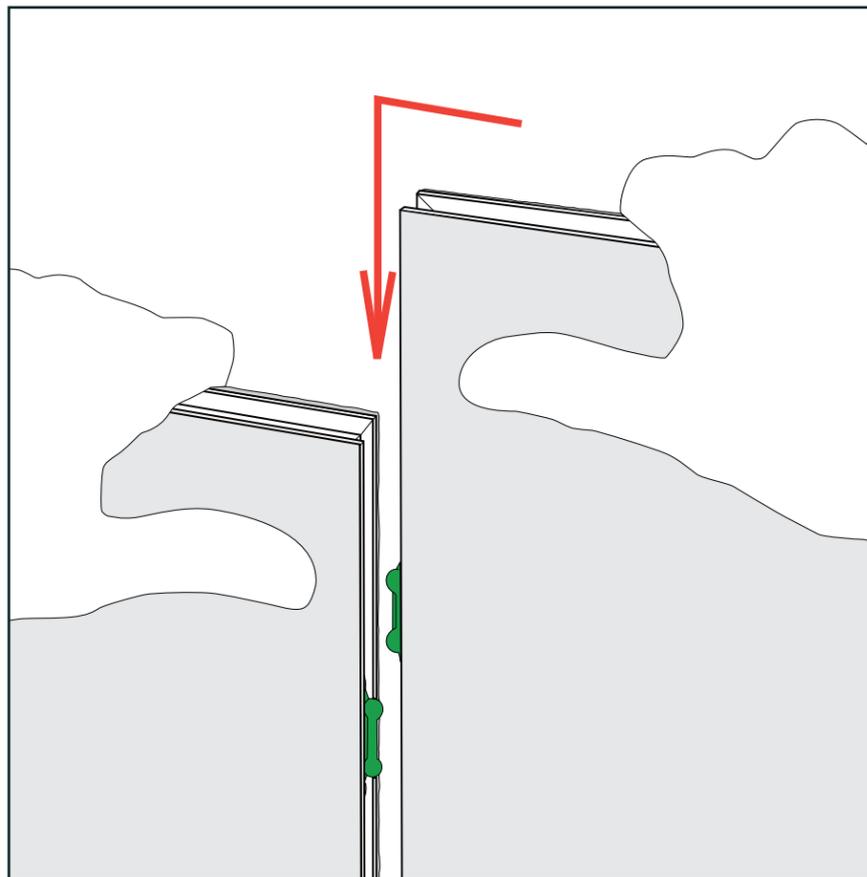




Item	Qty.	Description
1	2	Base Plate
1A	2	Base plate w/ two holes
2	1	95.75"h Q914 Vertical Extrusion
3	1	95.75"h Q914 Vertical Extrusion
4	1	95.75"h Q914 Vertical Extrusion
5	1	95.75"h Q914 Vertical Extrusion
6/6A	2/2	30"w Z45 Horizontal Extrusion
7/7A	1/1	36"w Z45 Horizontal Extrusion
8	2	37.75"h Q914 Vertical extrusion
9	4	9"w Z45 Horizontal Extrusion






**Steps:**

- 1) Connect base plates [1] to verticals [2] & [5];  
repeat step to connect base plates [1A] to verticals [3] & [4].
- 2) Connect horizontals [6], [6A] [7] & [7A] between verticals [2, 3, 4 & 5] where indicated.
- 3) Attach verticals [8] to base plates [1A], and connect horizontals [9] between vertical [3] & [8] and [4] & [8] where indicated.
- 4) Attach Graphics to the frame using velcro on the back side of the frame.

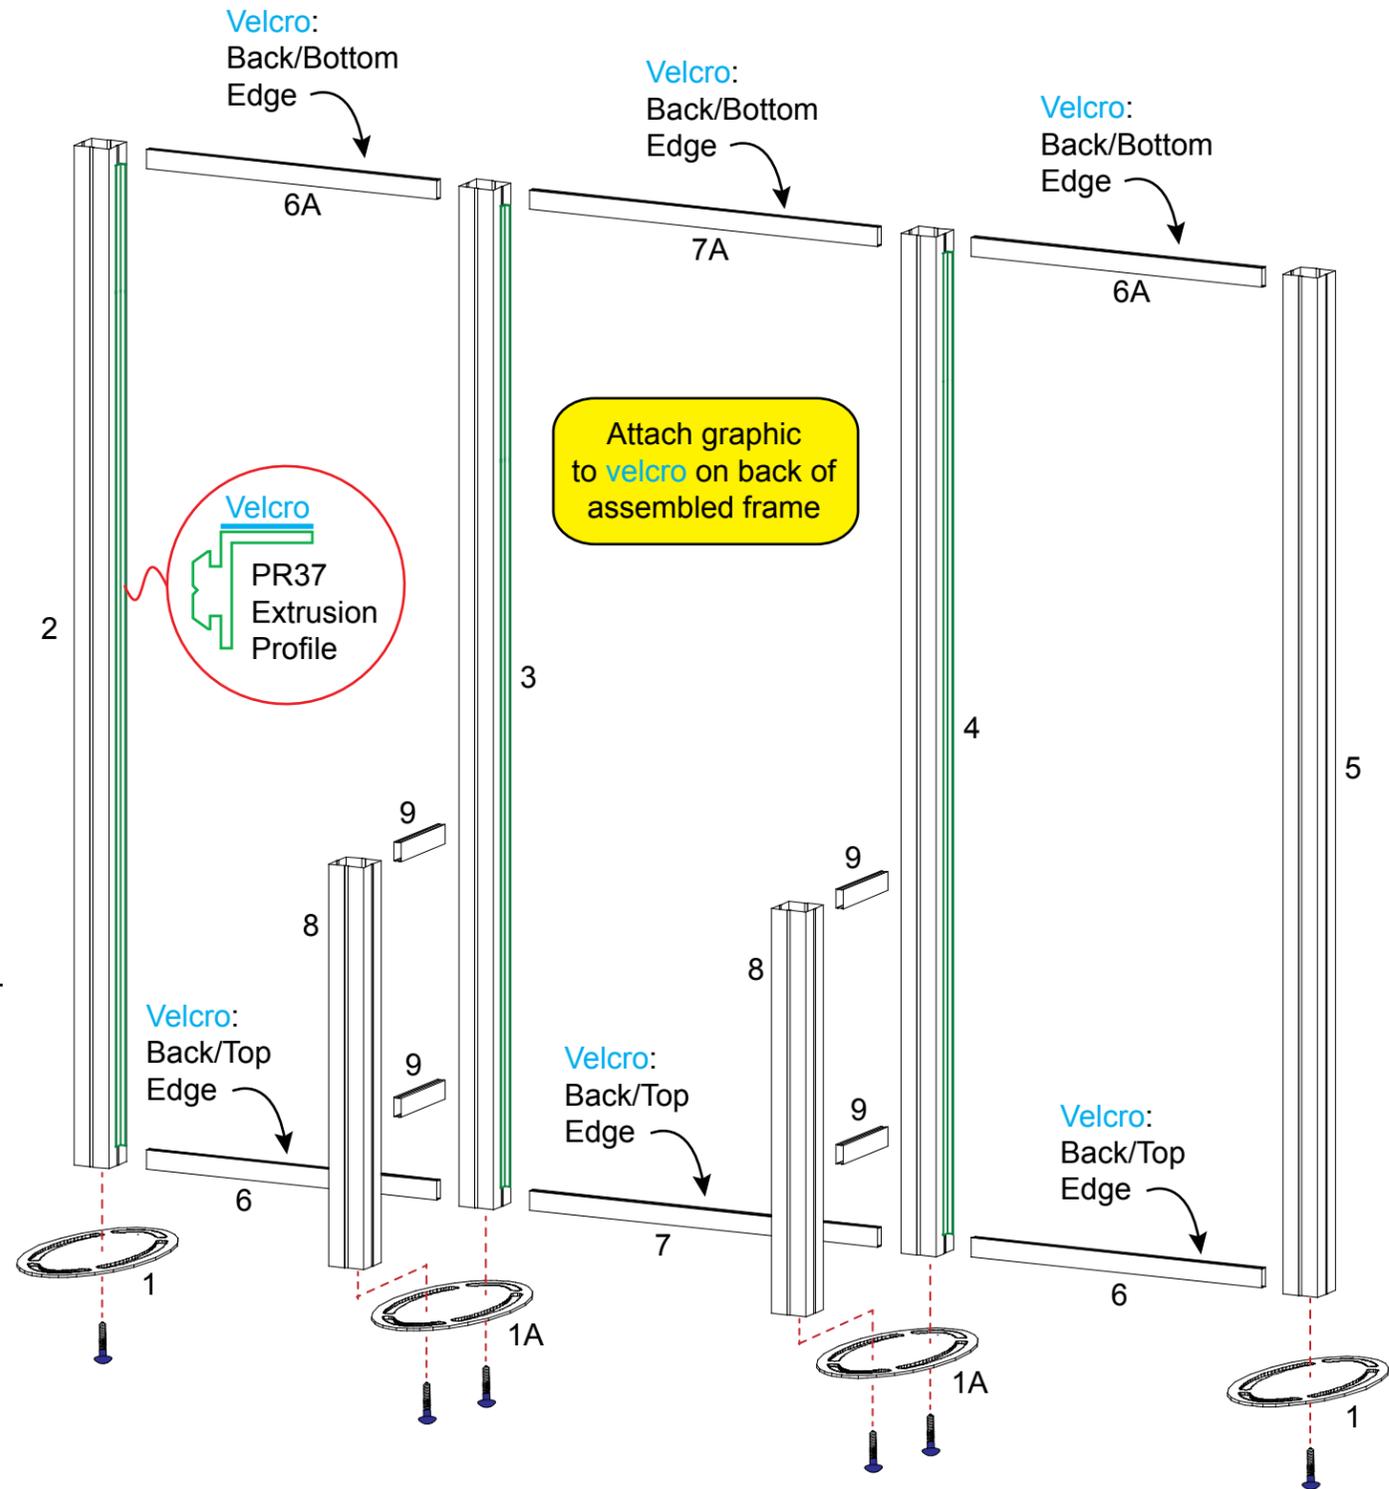



Steps:

- 1) Place counters on top of verticals [7] and secure in place.  
See **Counter Top Attachment** detail.
- 2) Attach monitor mounts to backwall where indicated.  
See **Monitor Mount Attachment** detail.
- 3) Attach lights on top of assembled backwall.  
See **Light Connection** detail.

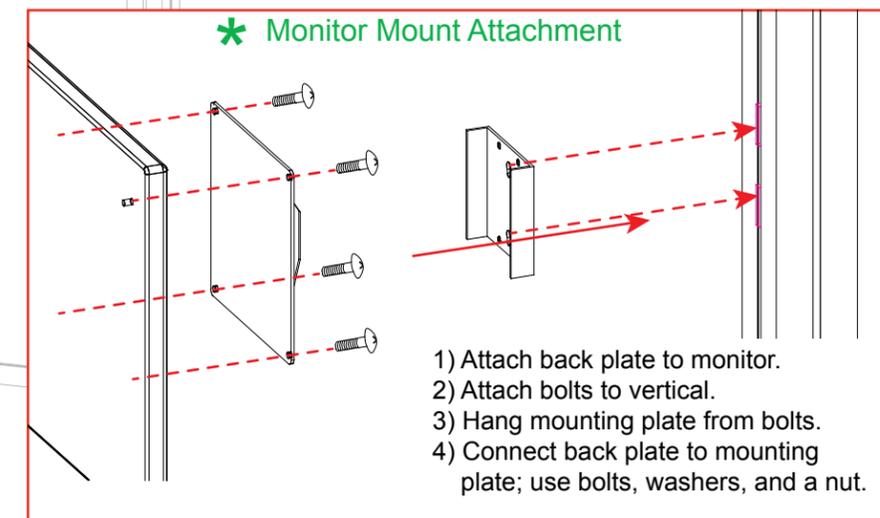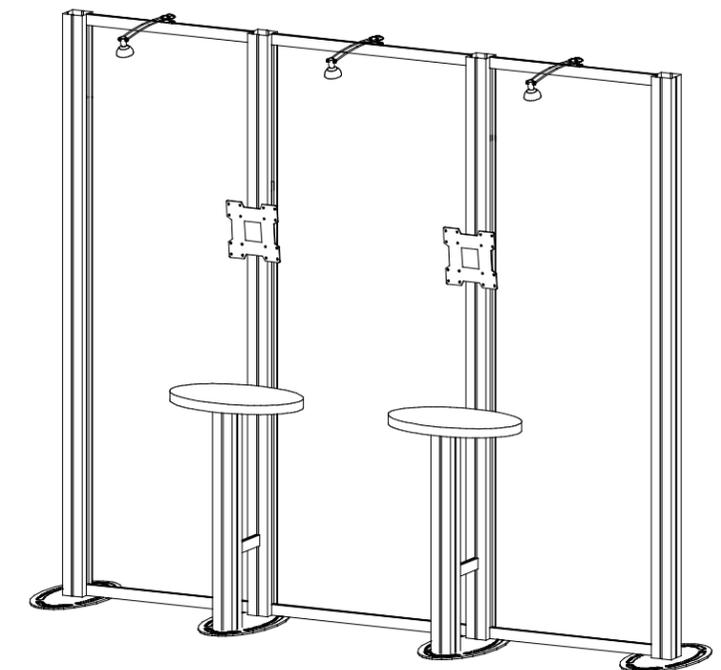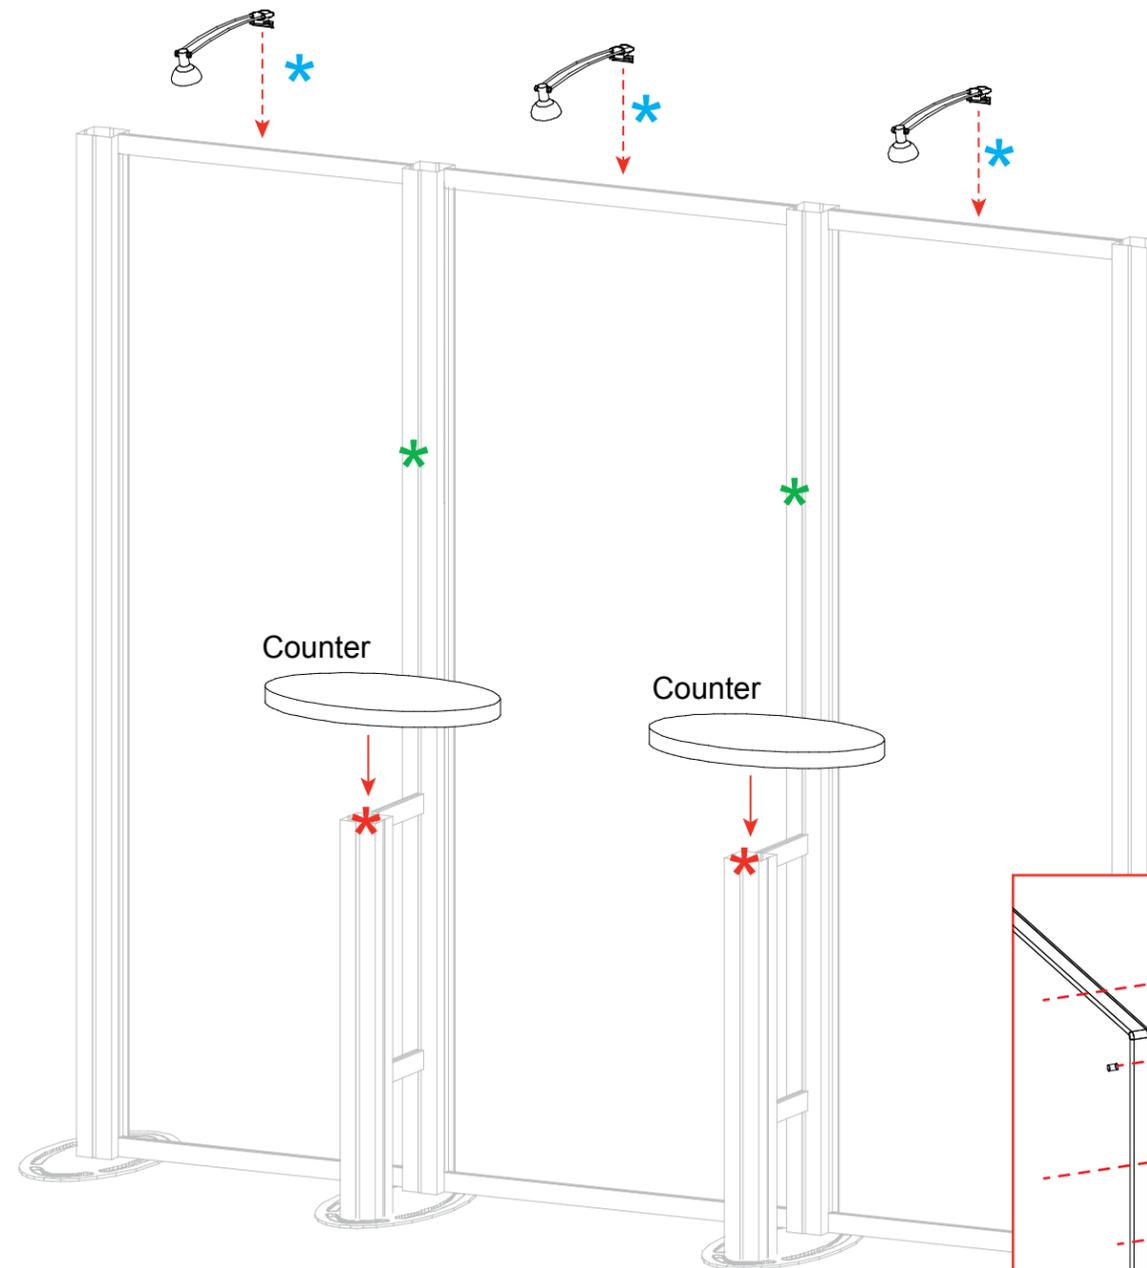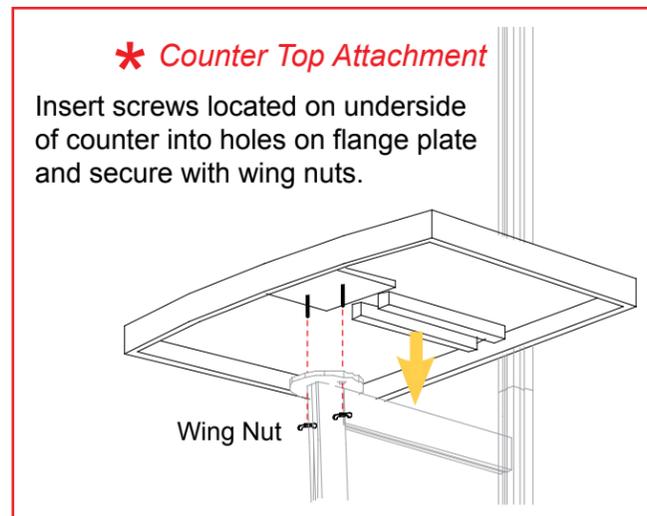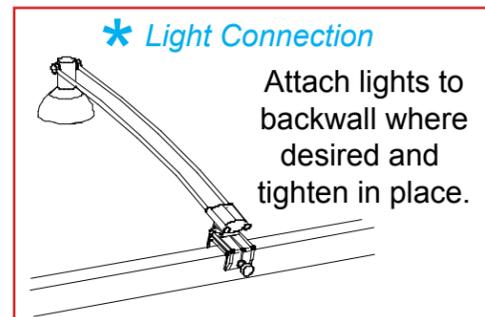

Item	Qty.	Description
1	1	38" S44 Vertical Extrusion
2	1	38" S44 Vertical Extrusion
3	1	41.2385" Z45 Curved Horizontal Extrusion
4	1	41.2385" Z45 Curved Horizontal Extrusion
5	1	16.35" Z45 Horizontal Extrusion
6	1	34.41" Z45 Vertical Extrusion w/ Door Hinges
7	1	41.2385" Z45 Curved Horizontal Extrusion
8	1	41.2385" Z45 Curved Horizontal Extrusion
9	1	16.35" Z45 Horizontal Extrusion

- Steps:**
- 1) Attach curved panels [1,2] together.
  - 2) Attach lower horizontals [3,4,5] between assembled curved panels and verticals [1,2].
  - 3) Attach vertical [6] to lower horizontal [4], Placing infill as shown.
  - 4) Insert infills as shown.
  - 5) Attach upper horizontals [7,8,9] between assembled curve panels and verticals [1,2] atop infills.
  - 6) Hang door from hinges as shown in detail.
  - 7) Place internal shelf on shelf supports
  - 8) Set counter tops on top of assembled base.

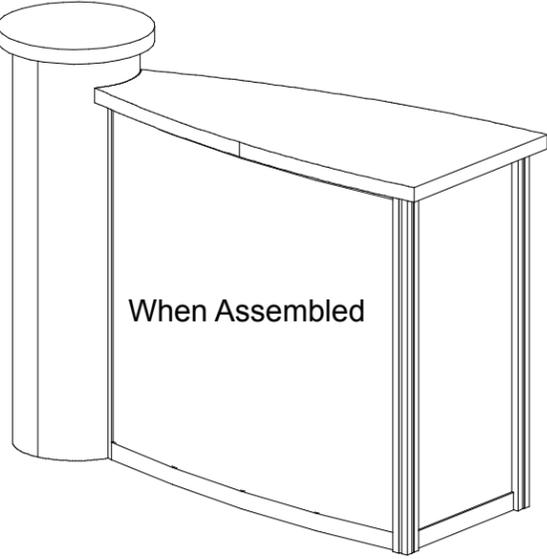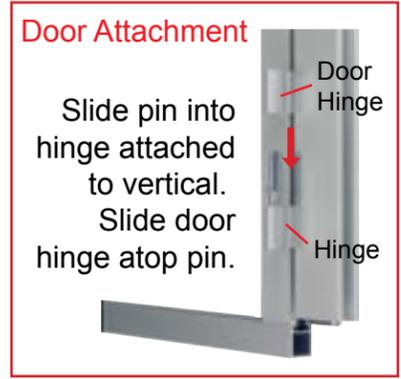

Item	Description
1	5.75"r x 42"h Half Curve Panel
2	5.75"r x 42"h Half Curve Panel

