



Top View

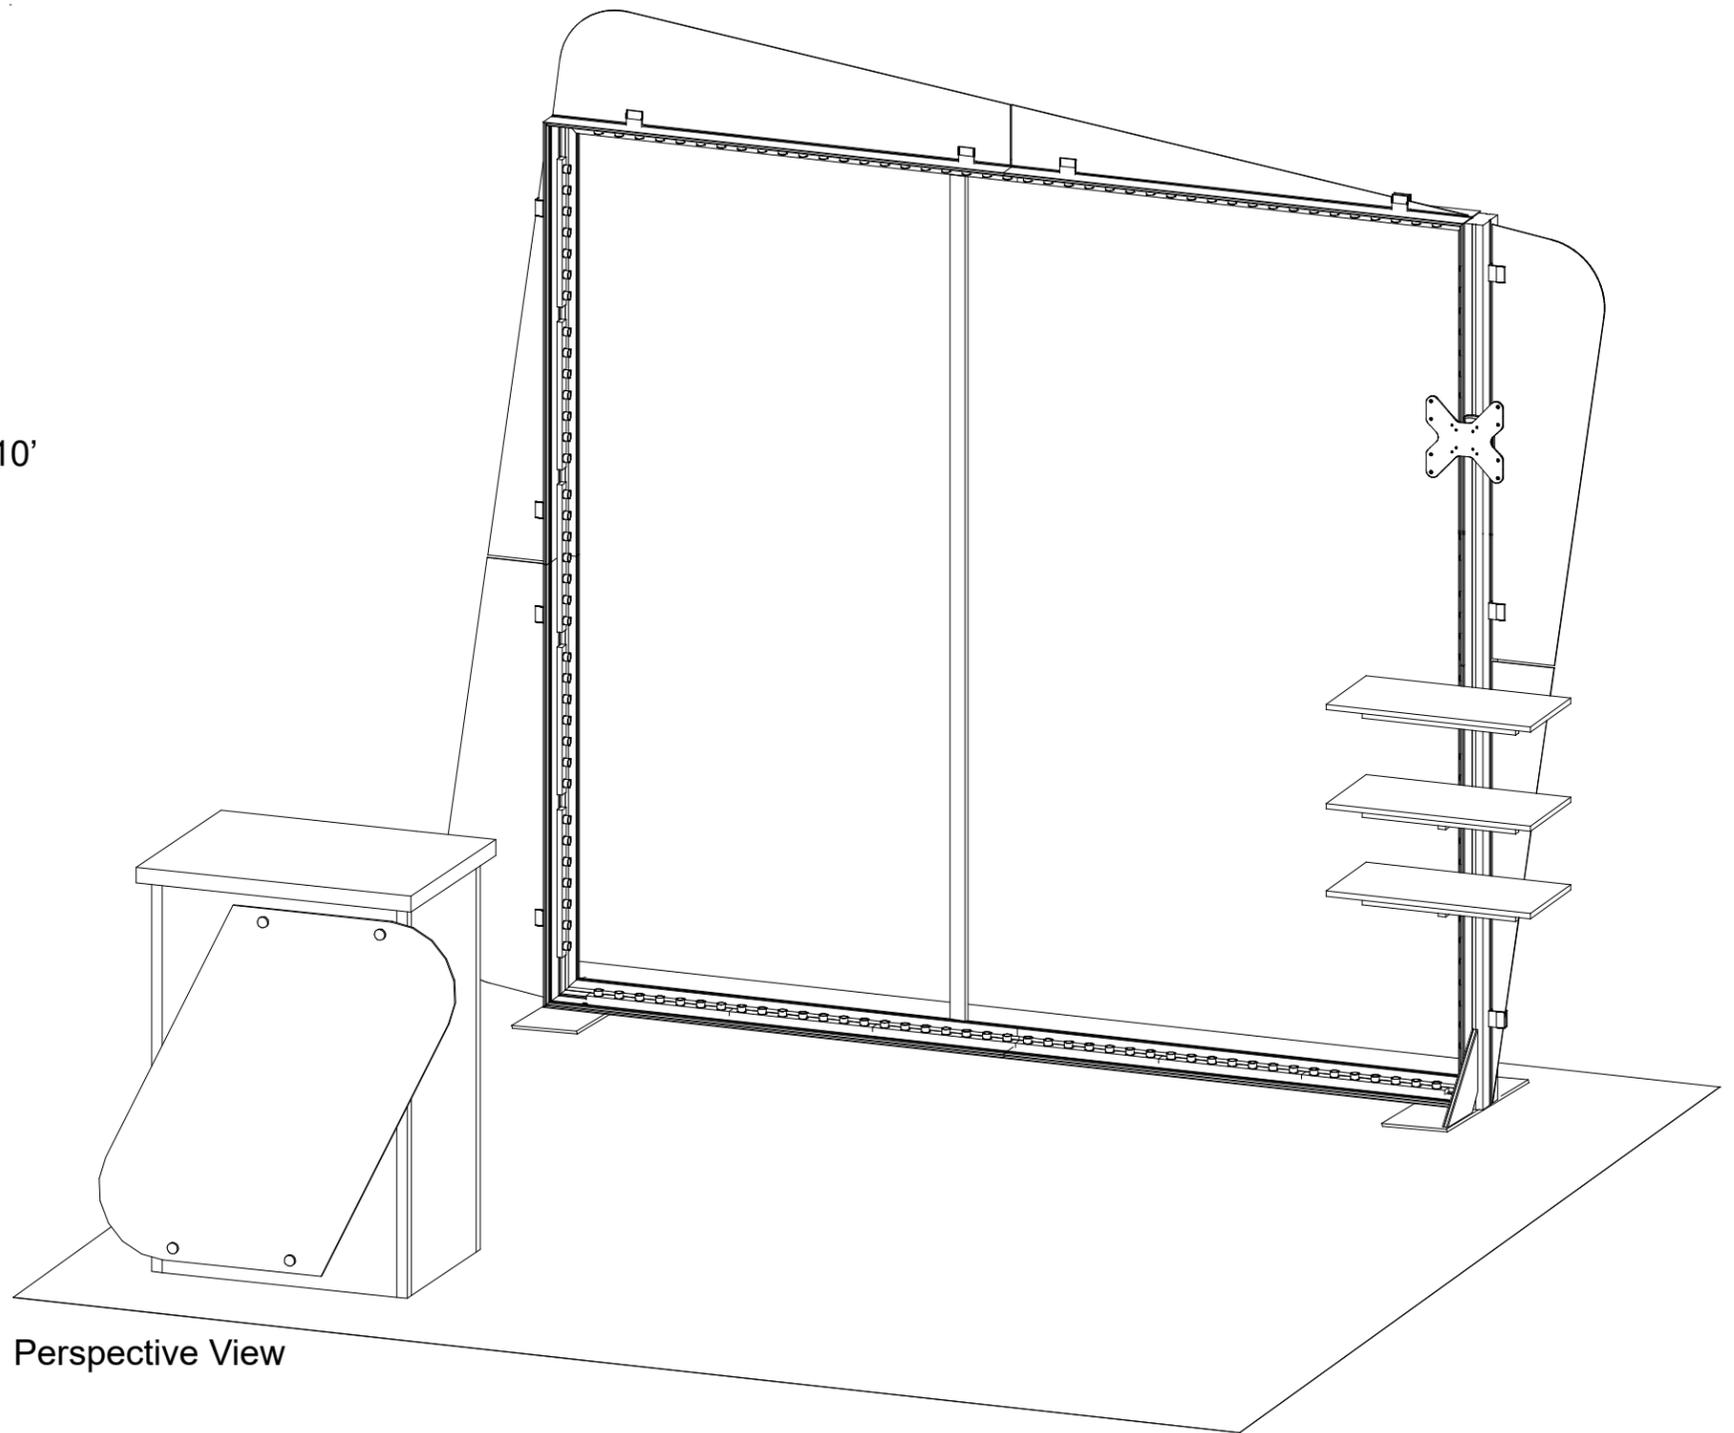

Perspective View

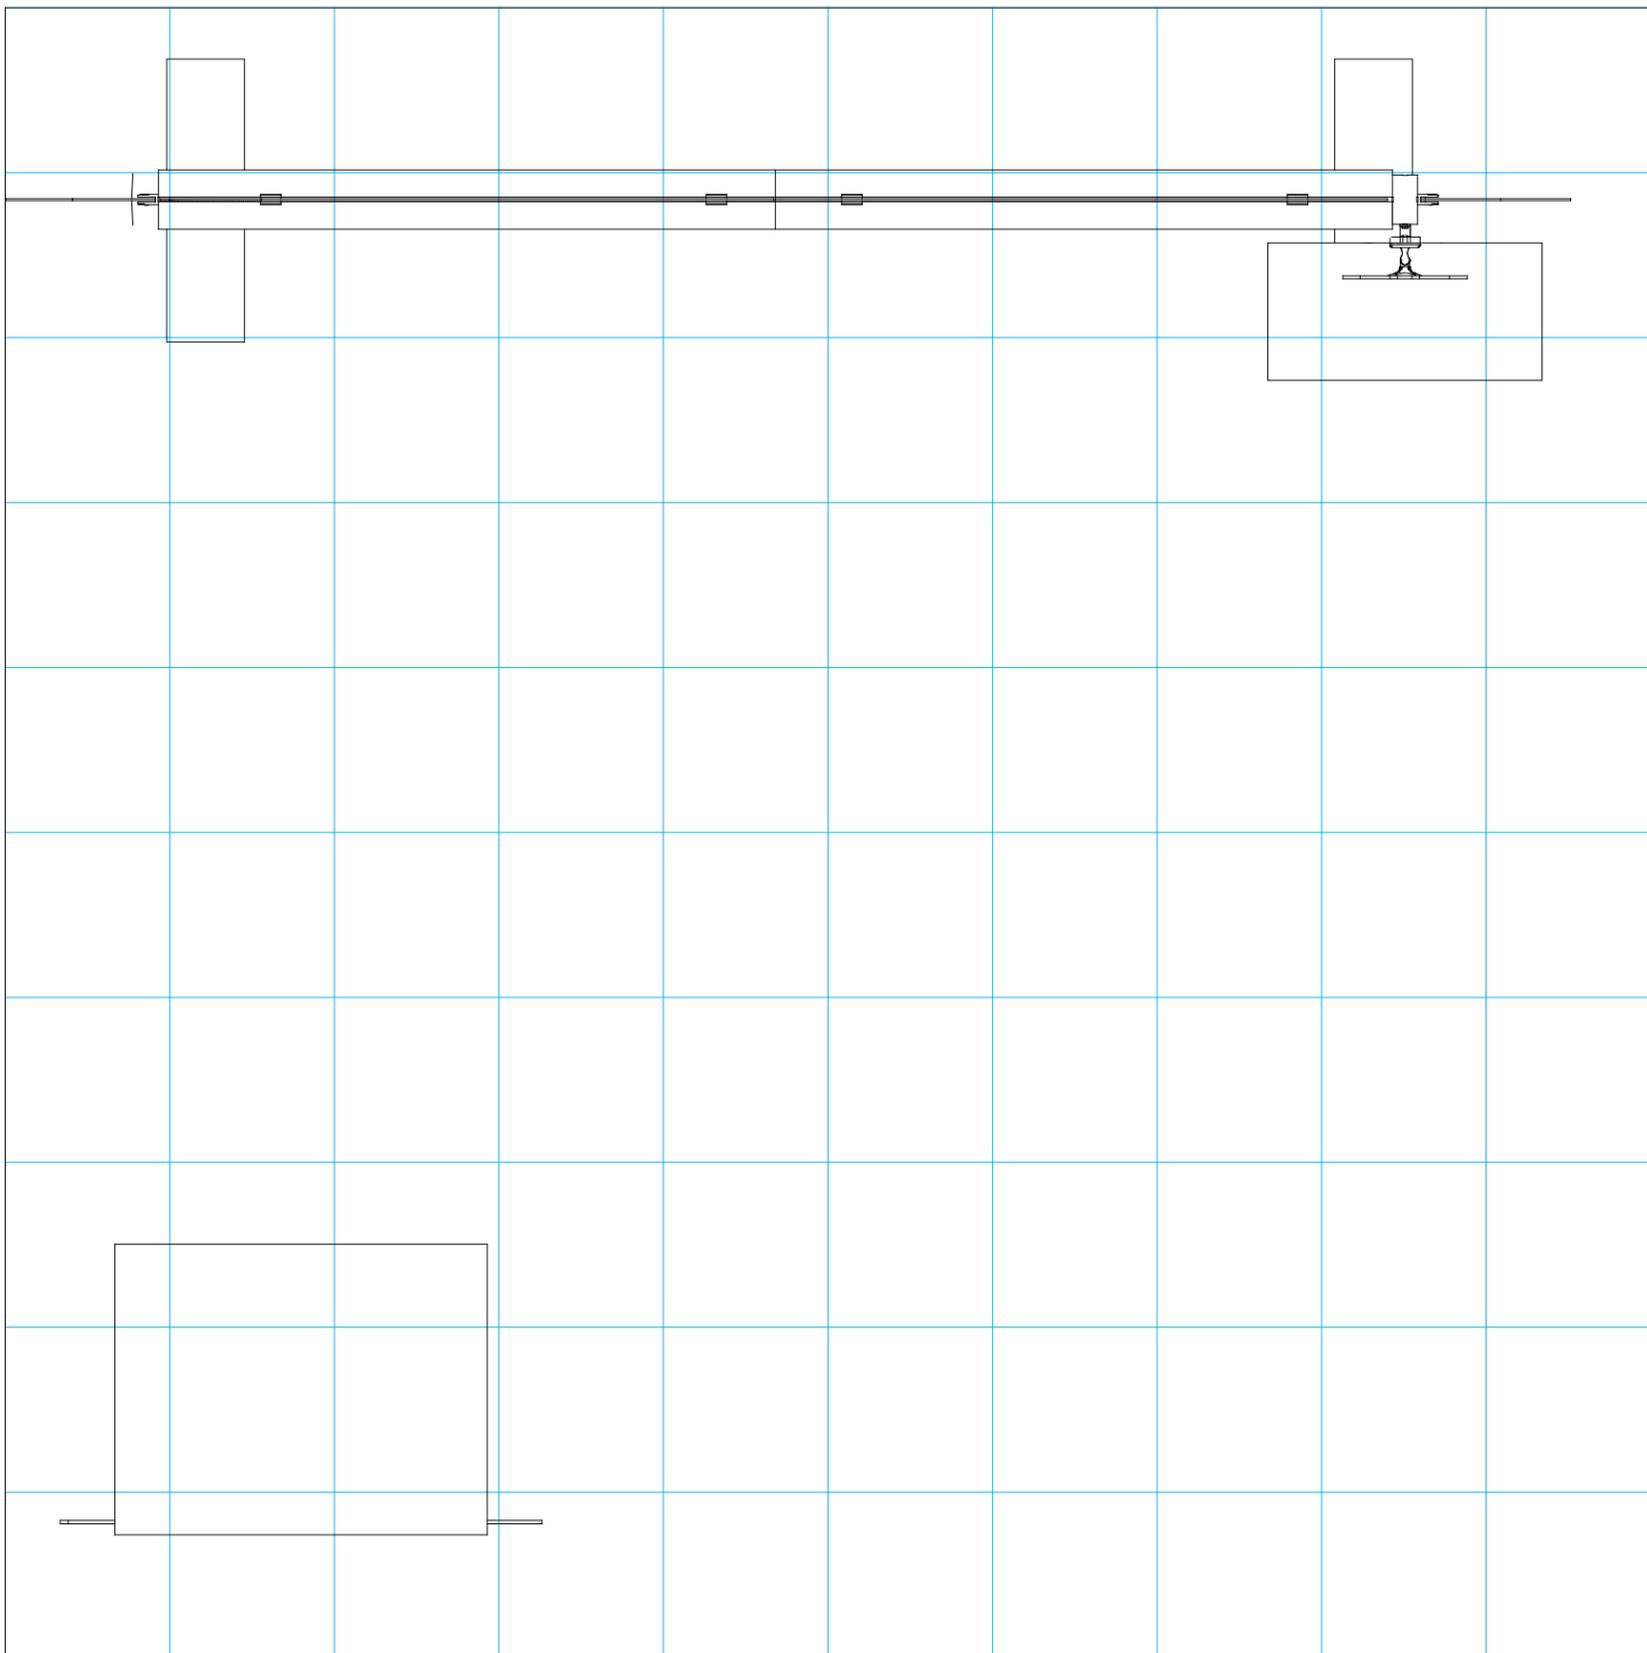

= 1 sq foot

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

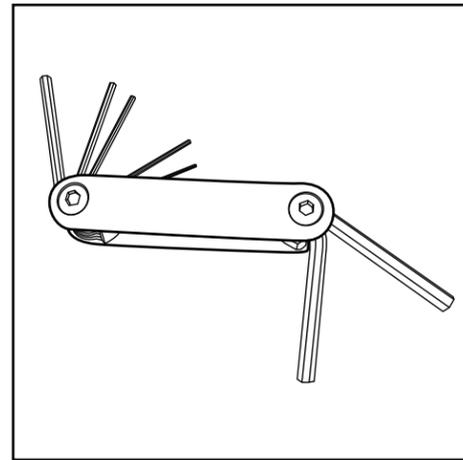


Hex Tool - Essential for Assembly

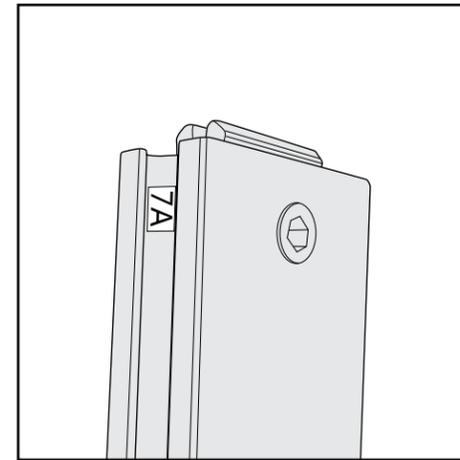


Part Identification - Numbering

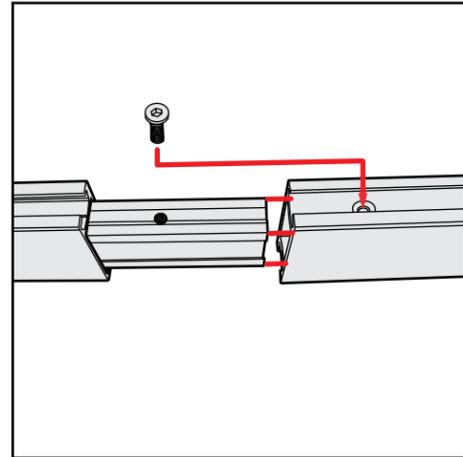


Spline Connection

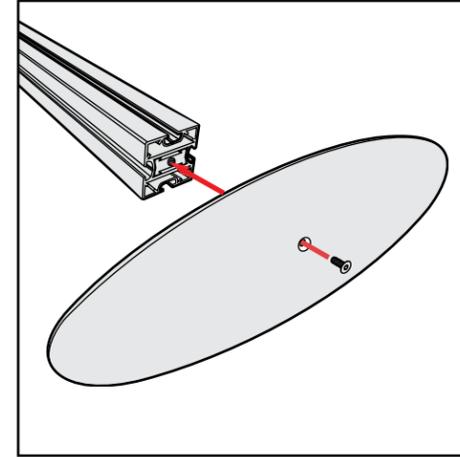

Base Plate & Extrusion Connection

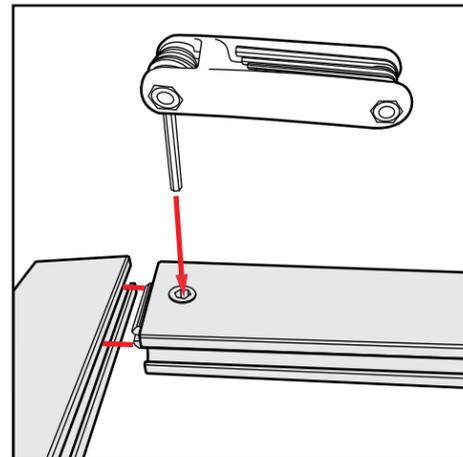

Extrusion & Lock Connection

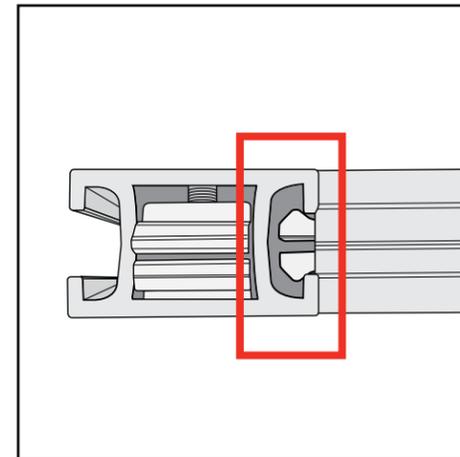

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS MAY BE REQUIRED





ALL CONNECTIONS MUST BE TIGHTLY SECURED

Straight Connection

When assembling frame, first attach all **straight connectors**, then attach **corner connectors**.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide **straight connectors** across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

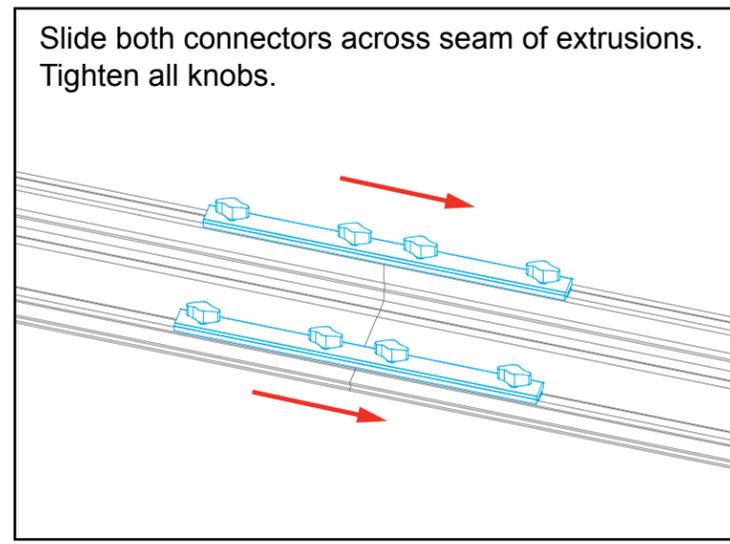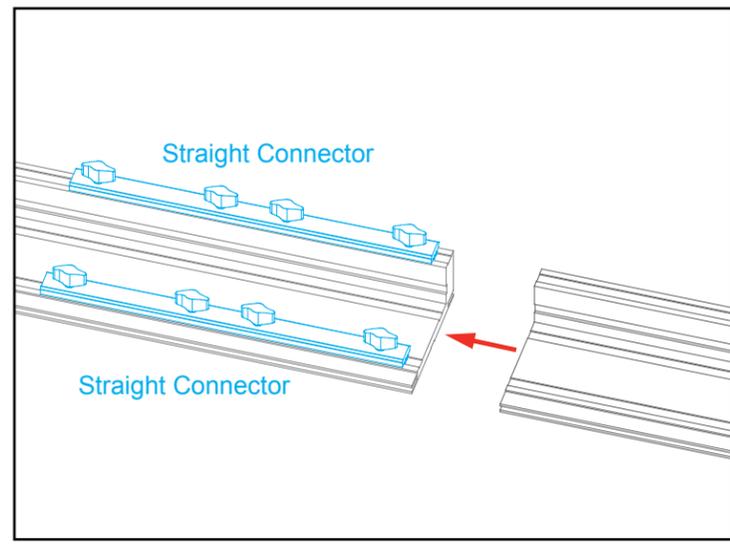

All knobs must be tightened securely to ensure a proper connection.

Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

Corner Connection


- 1) Loosen knobs, then slide vertical extrusions onto **corner connectors** of **lower** horizontal extrusion.
- 2) Slide **corner connectors** of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of **corner connectors** on lower and upper horizontal extrusions.

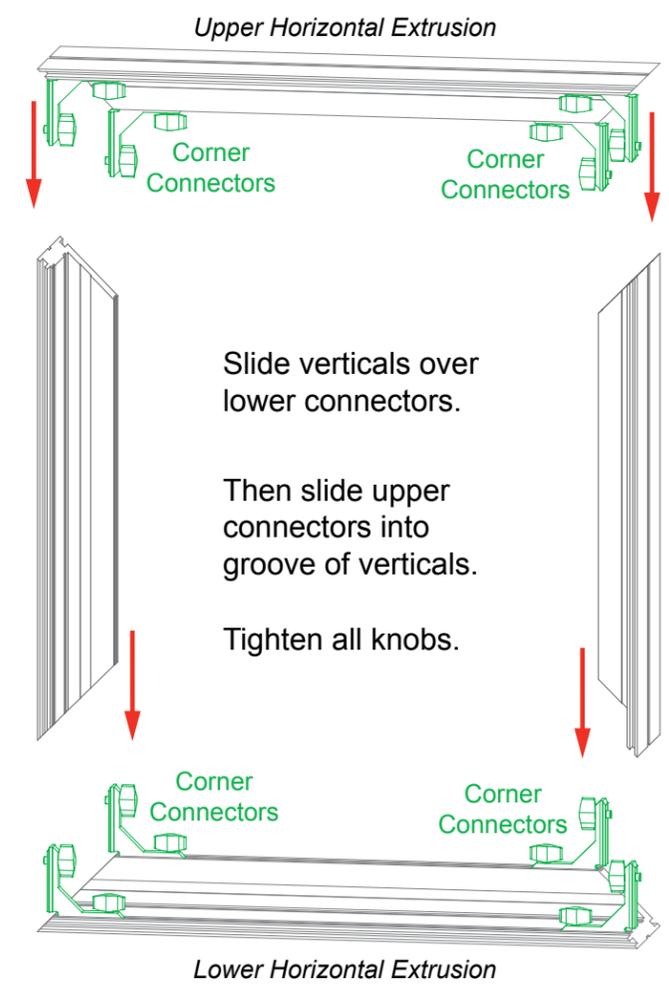


Adjust connectors if necessary to prevent gaps in connection.

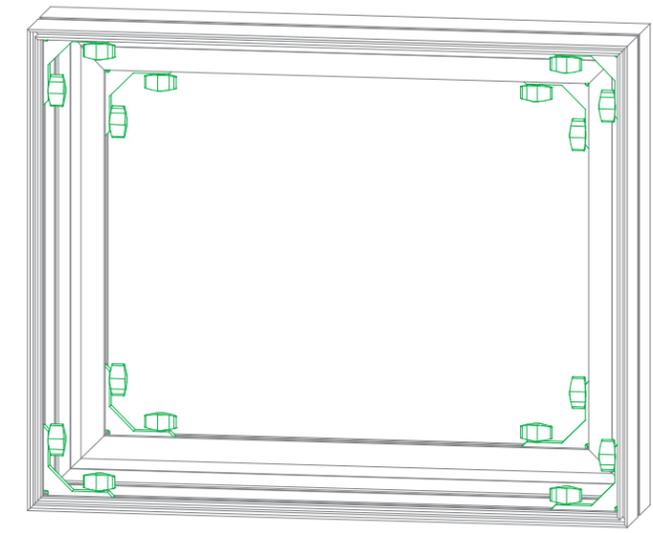

COMPLETED ASSEMBLY

All knobs must be tightened securely to ensure a proper connection.

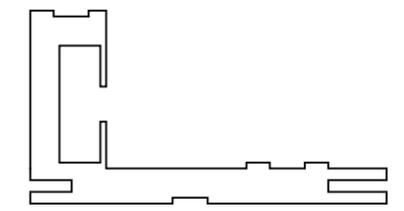

CEI110 Profile

euro lt | HYBRIDS


Using Your Setup Instructions

The Euro LT Hybrids Setup Instructions are created specifically for your configuration. They are laid out sequentially in levels, including exploded views, and a logical series of detailed steps to assemble the main structure and components. We encourage you to study the instructions **before** attempting to assemble your exhibit.


Each page reminds you to tighten the setscrews after disassembling your exhibit to prevent loss of the locks and setscrews (see below in RED). This is VERY IMPORTANT.

Cleaning and Packing Your Display


- 1) Use care when cleaning aluminum extrusion or acrylic inserts. Use only non-abrasive cleaners.
- 2) When cleaning laminate inserts, countertops, or panels use mild cleansers and a soft material such as cotton.
- 3) Keep all display components away from extreme heat and long exposure to sunlight to avoid warping and fading.
- 4) Retain all packing material. It will make re-packing much easier and will reduce the likelihood of shipping damage.

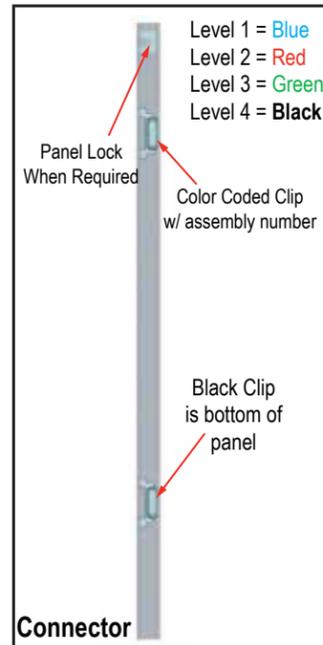


Each component has 2 clips, the lower clip is ALWAYS black. The top clip is color coded to distinguish which level. The color coded clip also contains the numbered label.

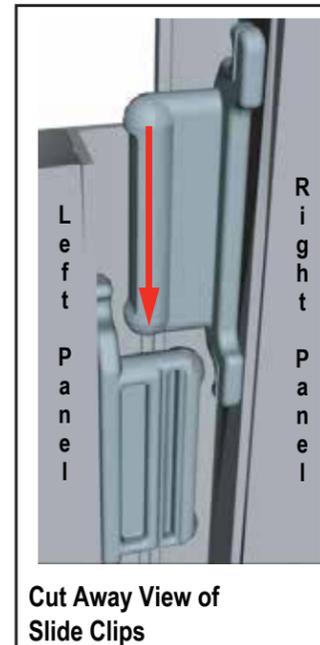

Components connect together by aligning them and sliding downward connecting clips together.

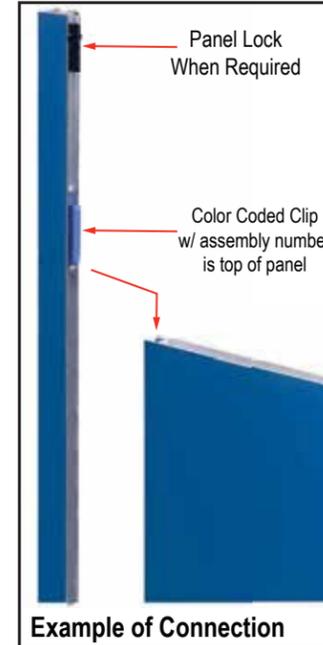

Configurations are assembled from left to right, usually starting with #1 and following the numbered sequence.

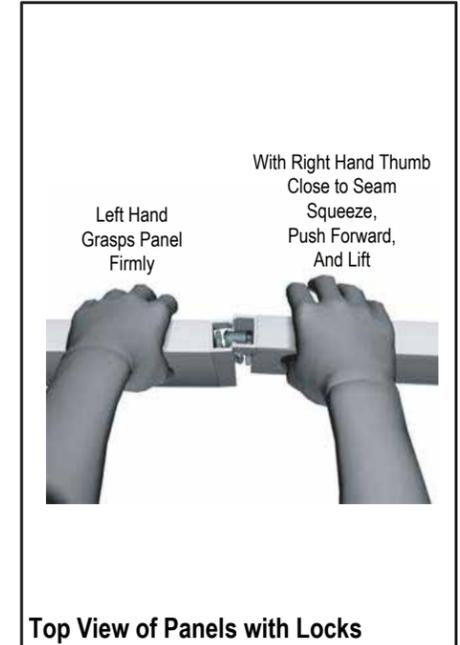

The first level of components contain panel locks that are located at the top of the panel for extra stability and seamless connection. When disassembling panels twist top connection slightly and lift right panel upward.


General Setup Instructions for Extrusion System



Most exhibits can be assembled with the supplied Hex Key Tool. Occasionally, a flat head screwdriver may be required.




Most horizontal extrusion connections have a patented expandable lock. This lock inserts into the groove of an opposing extrusion. Tightening the lock with the Hex Key Tool expands the lock and creates a strong positive connection.

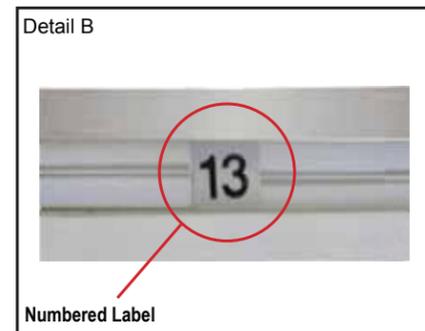


Each extrusion contains a numbered label which corresponds with setup instructions. The label is located within a groove of the extrusion (when possible). With extrusion components the labels contain Black numbers unless otherwise specified.



Remove only (1) setscrew when disassembling. Replace setscrew in extrusion after assembling it. Before packing, replace setscrew in extrusion to avoid losing it.

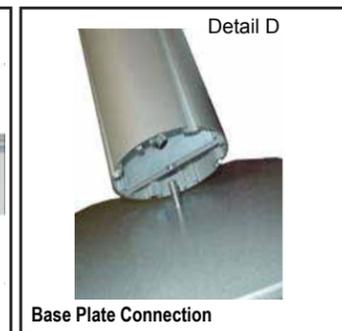


Attach base plate to round or square vertical extrusion using the bolt provided. Be careful not to strip the threads.

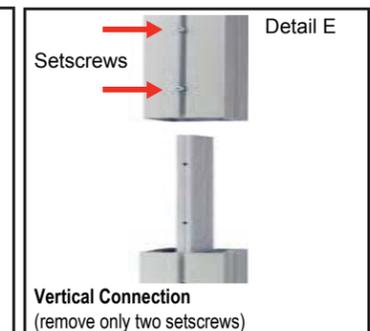


When vertical extrusions are packed in portable cases rather than crates or tubs, they must be broken down into smaller sections which then require assembly.

Remove only (2) setscrews when disassembling. Replace setscrews in extrusion after assembling it. Before packing, replace setscrews in extrusion to avoid losing them.

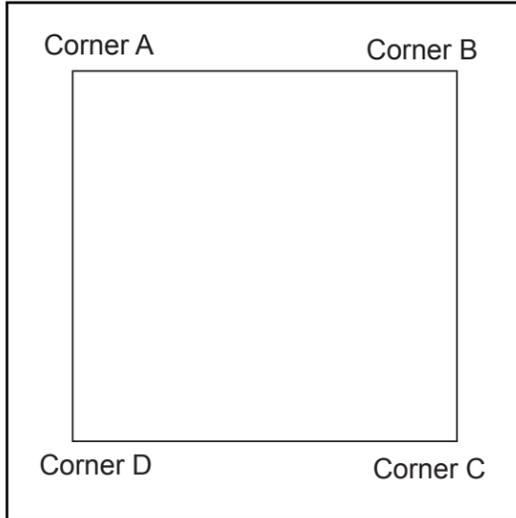

It is important to first insert graphic into each alternate corner then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.

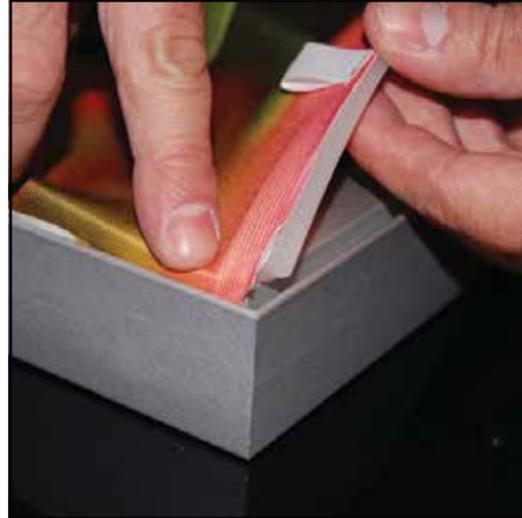

Step 1
Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.




Step 2
Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.




Step 3
Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.

Graphic Removal

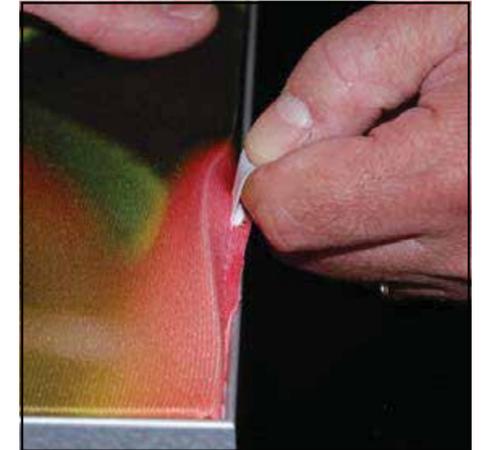


To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.


Top View of Each Level

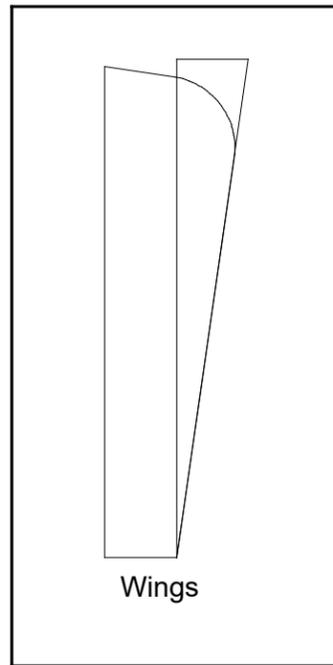


Level 1
(Bottom level)

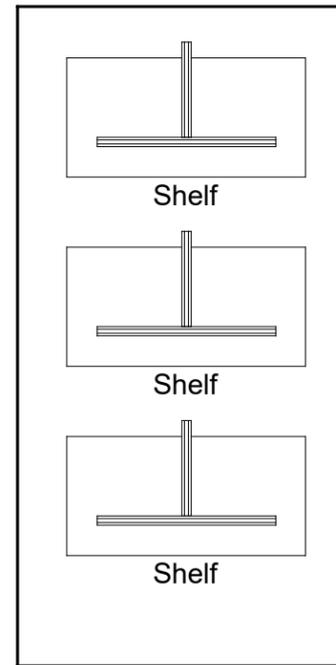


Level 2

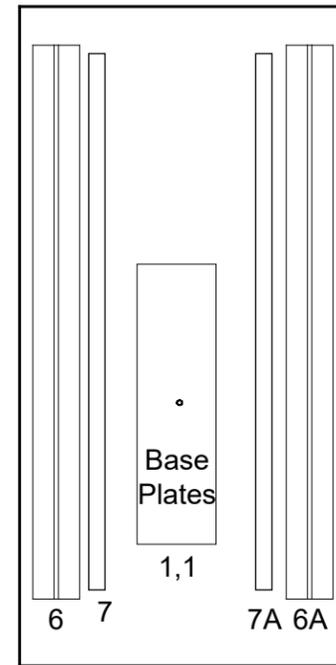

Level 3

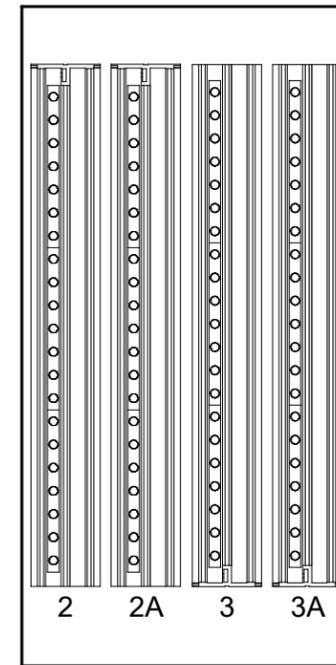


Level 4

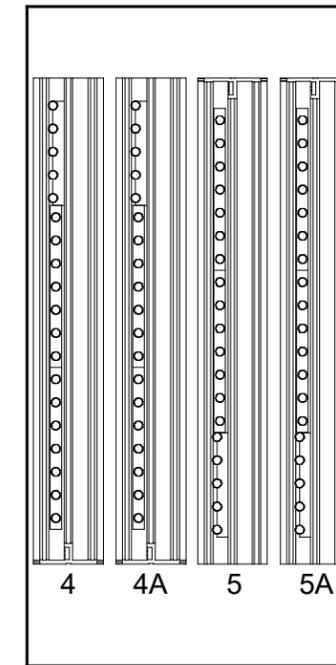


Level 5


Top View of Each Level

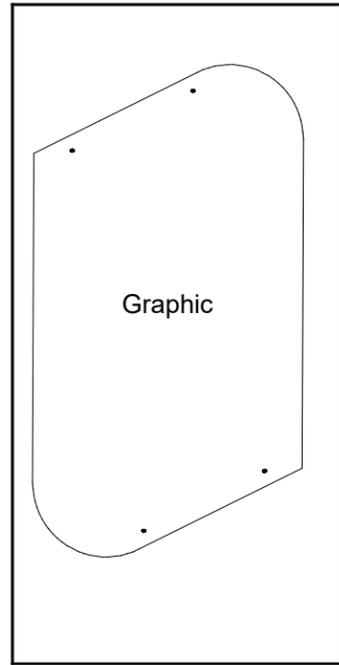


Level 1
(Bottom level)

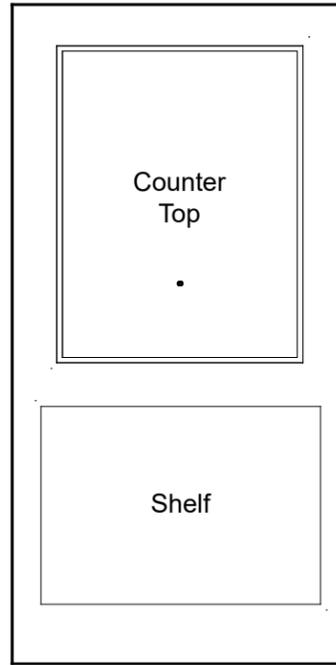


Level 2

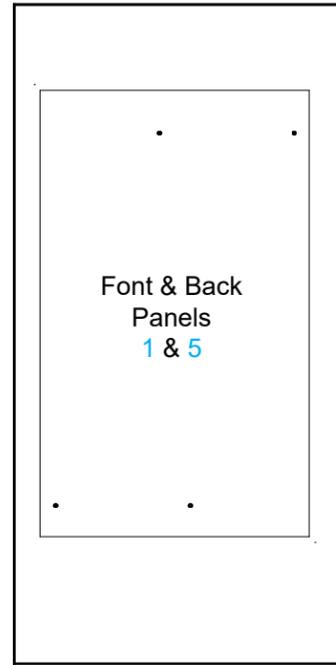


Level 3

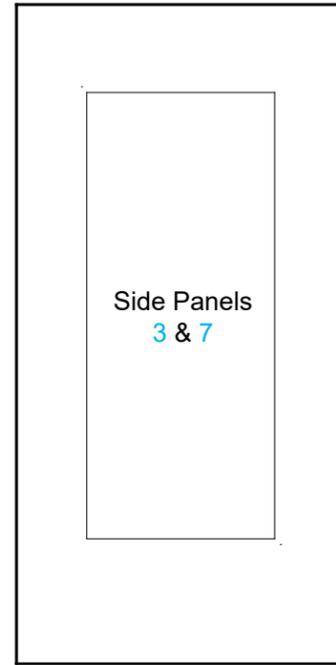

Level 4




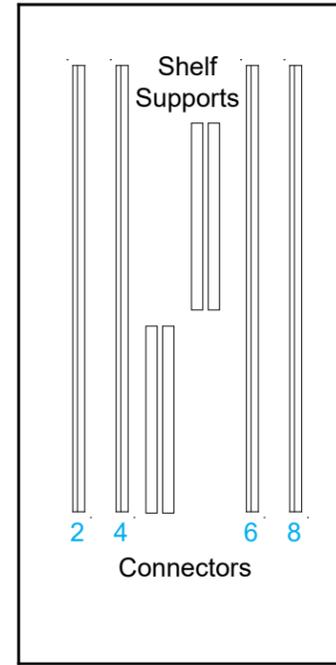


Level 5

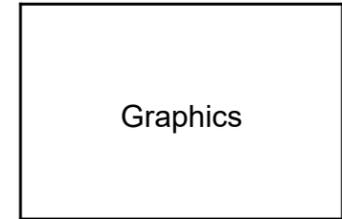





- Steps:
- 1) Attach base plates [1] to horizontals [2] & [3] using bolts, washers, and wing nuts.
 - 2) Assemble horizontals [2 to 3] [2A to 3A] and verticals [4 to 5] [4A to 5A] together.
See CEI-110 Frame Assembly sheet for instruction.
 - 3) Conect verticals [6] & [6A] together.
 - 4) Attach vertical assembly [6/6A] to assembly [4A/5A], using bolts.
See [S91 to CEI110 Attachment](#) detail.
 - 5) Attach verticals [7-7A] between horizontals as shown.
 - 6) Connect lighting cords and attach transformers. See [Light to Light Connections & Light to Transformer](#) details.
 - 7) Install SEG graphic to front of assembled frame and blocker fabric to back.
See SEG Graphic Installation sheet for details.

Item	Qty.	Description
1	2	Base Plate
2,2A	1,1	45" w CEI110 Horizontal Extrusion
3,3A	1,1	45" h CEI110 Horizontal Extrusion
4,4A	1,1	42" h CEI110 Vertical Extrusion
5,5A	1,1	42" h CEI110 Vertical Extrusion
6,6A	1,1	42" h S91 Vertical Extrusion
7,7A	1,1	40.187" h Z33 Vertical Extrusion

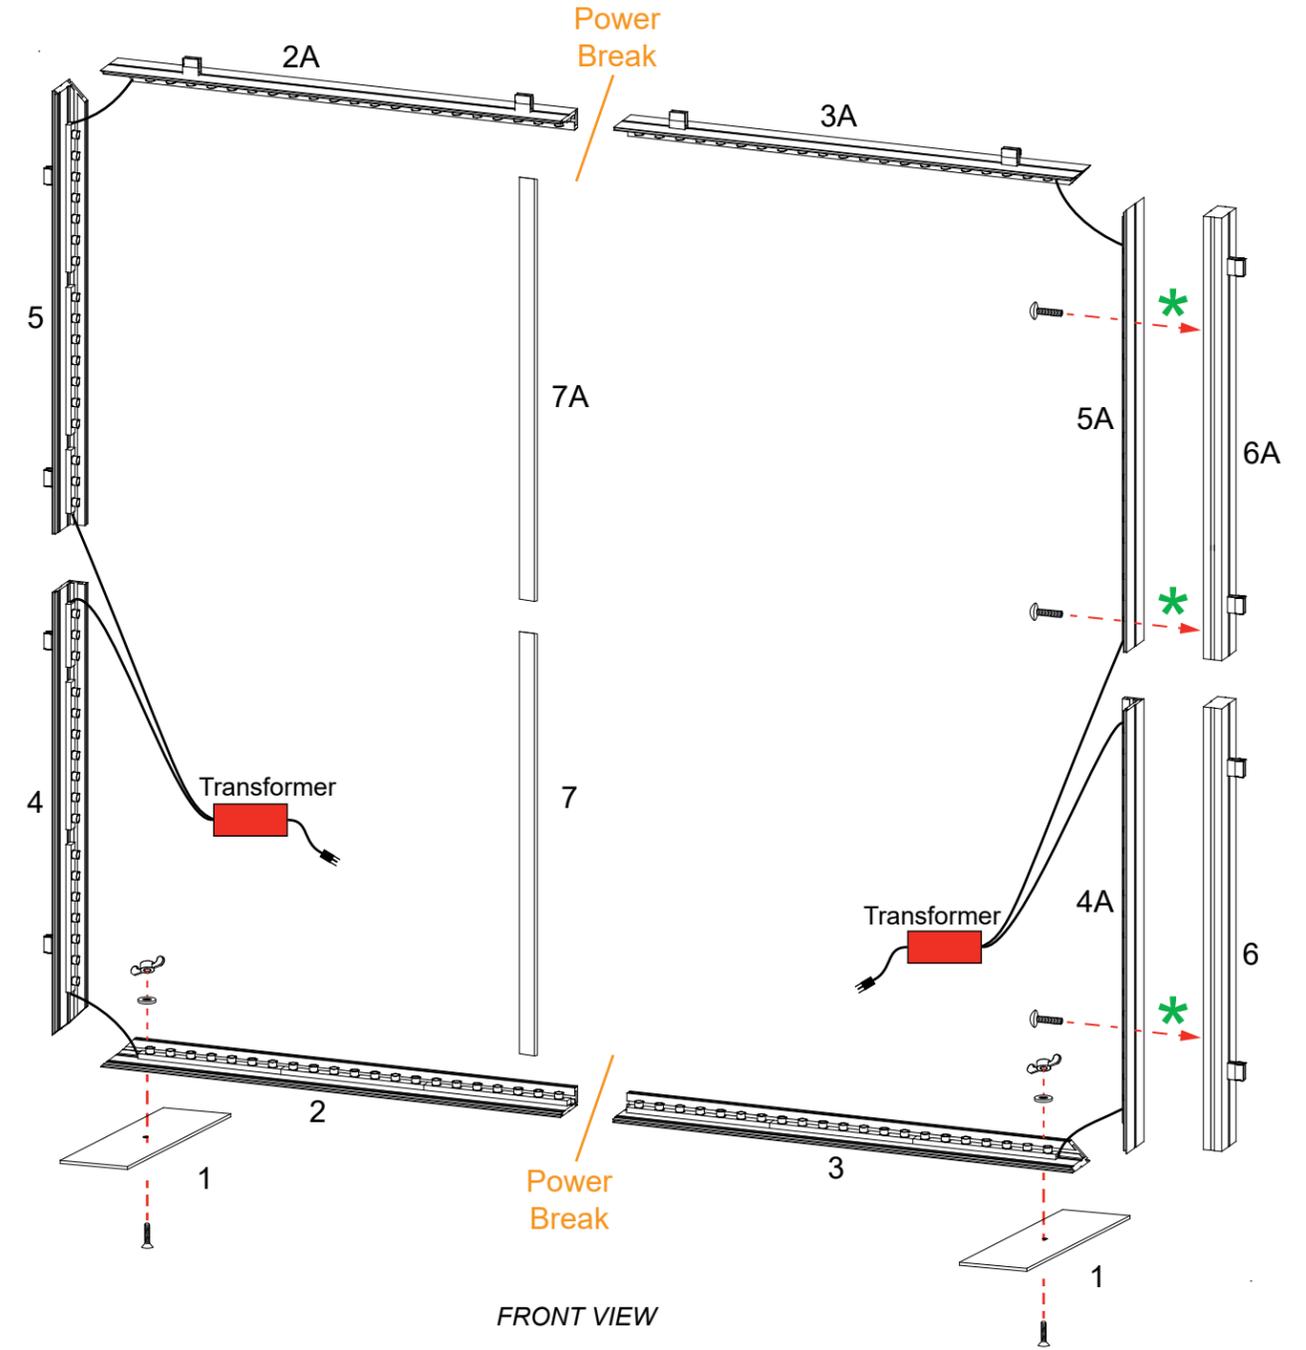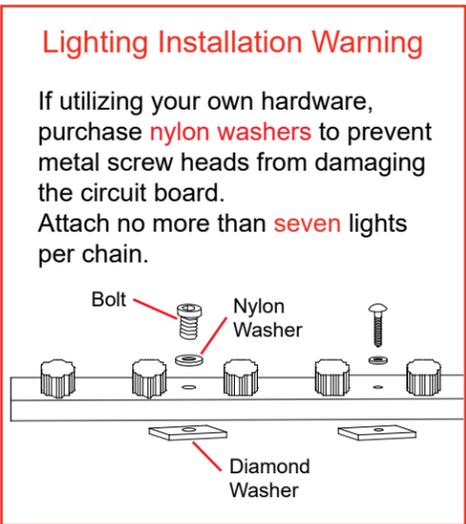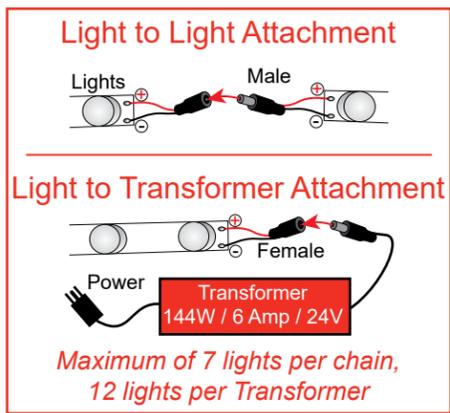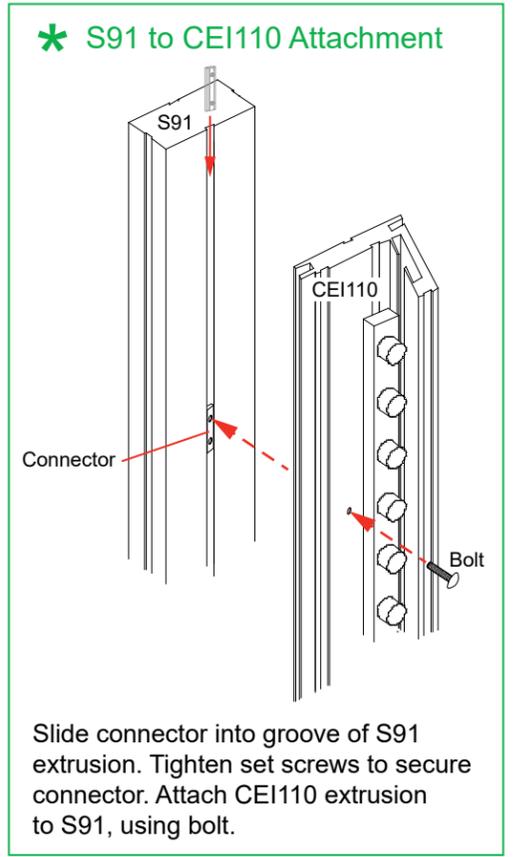


Steps:

- 1) Lock shelves to vertical [6]. See **Shelf Attachment** detail.
- 2) Attach monitor mount to vertical [6A]. See **Monitor Mount Attachment** detail.
- 3) Attach wings to top and sides, using A10 clamps. See **A10 Clamp** detail.

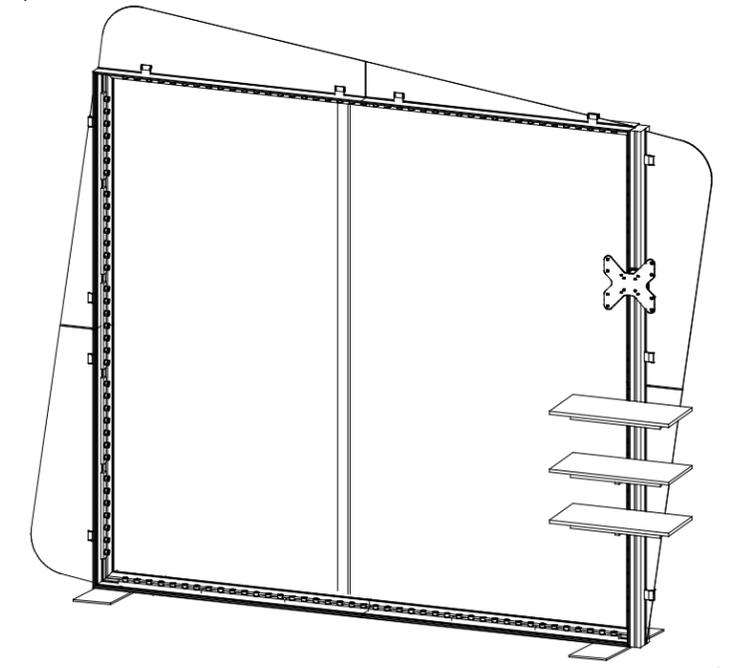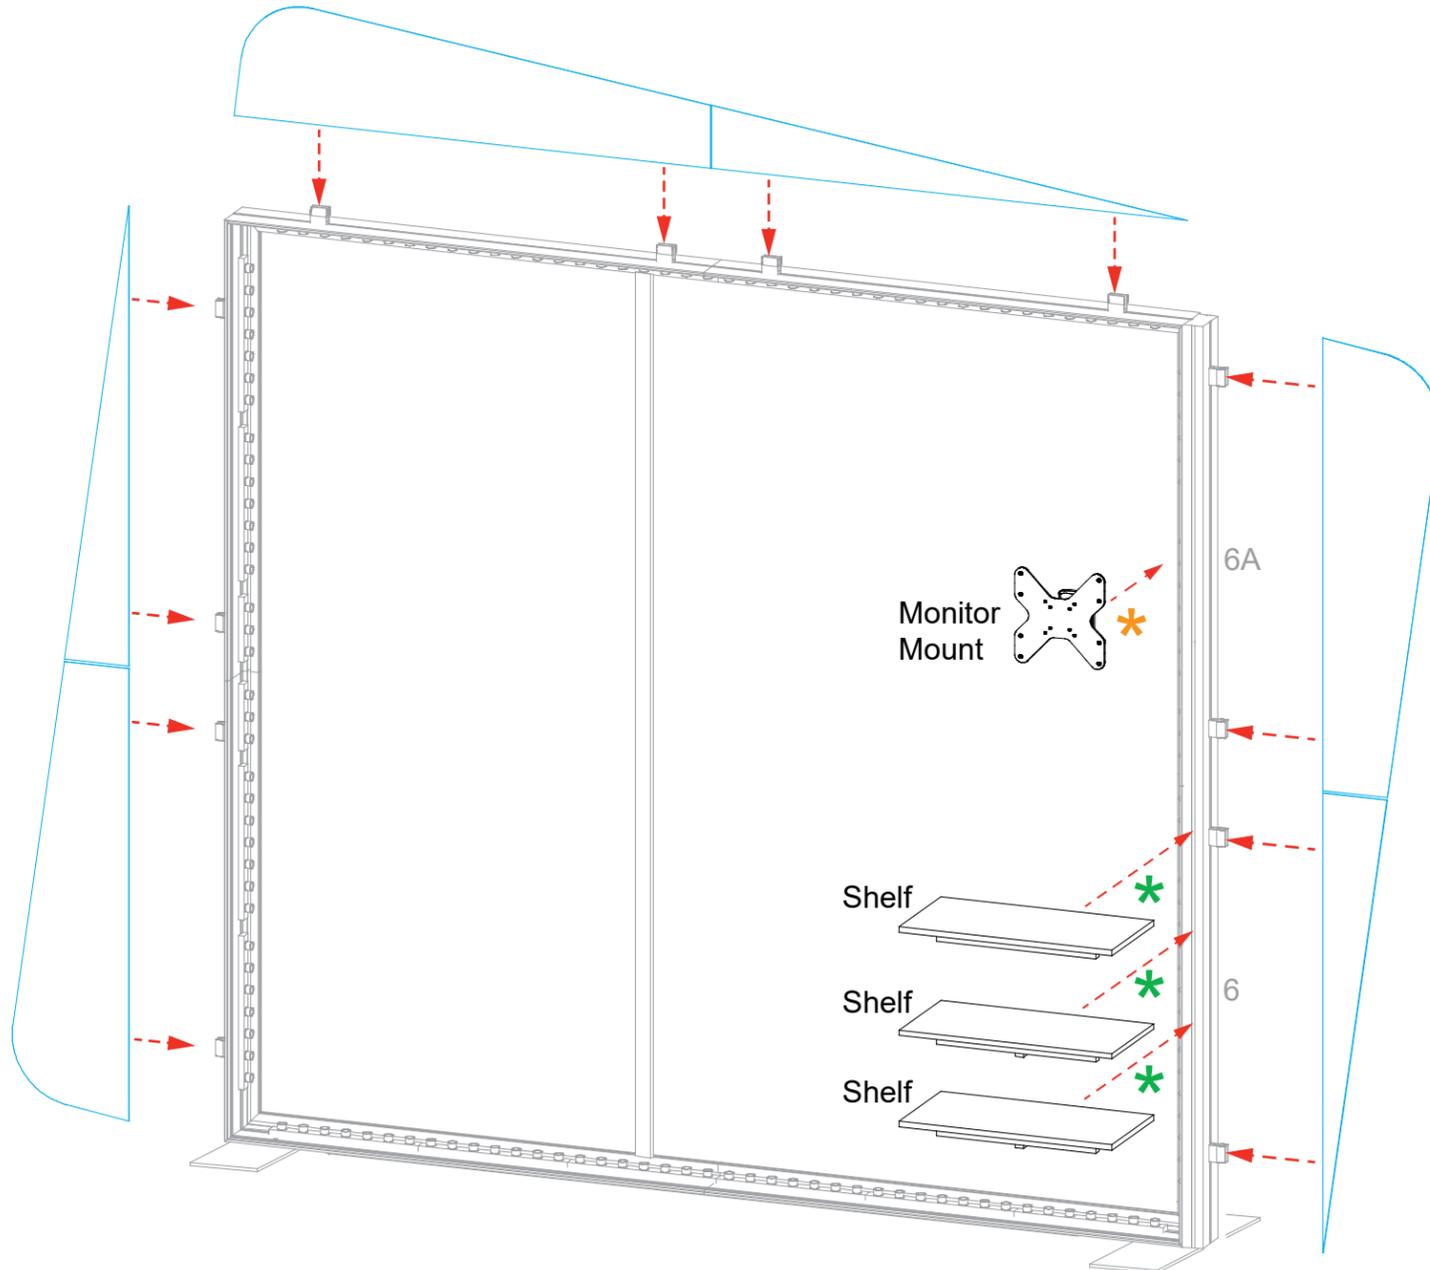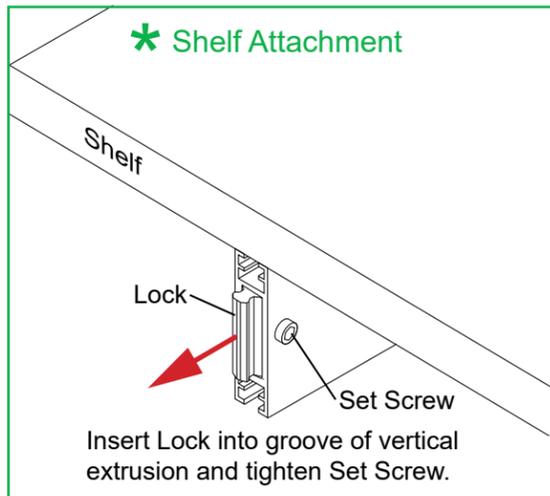
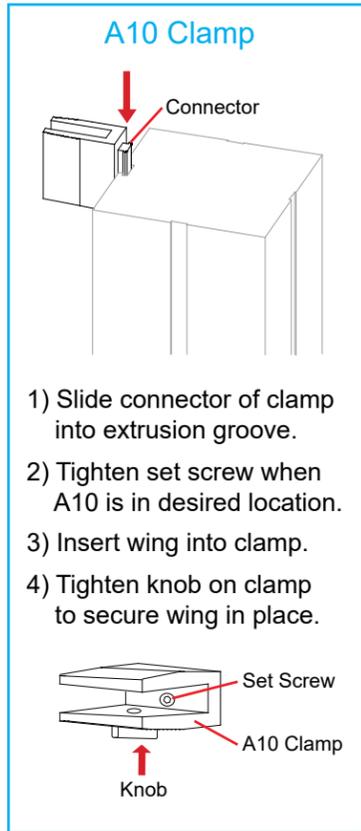


Completed Assembly


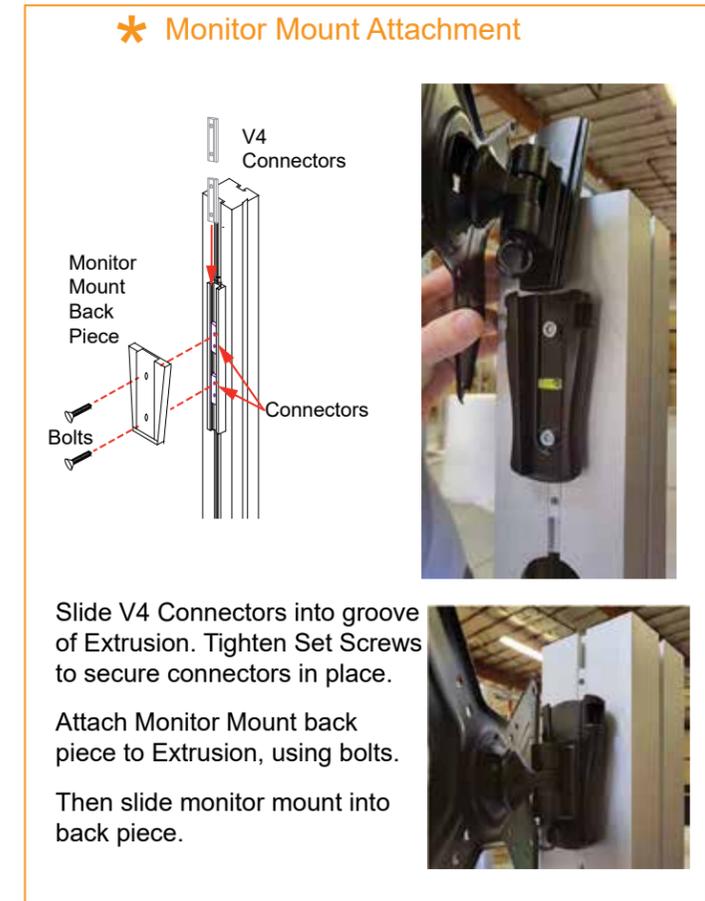


Item	Qty.	Description
1	1	23"w x 38"h Panel
2	1	38"h Connector
3	1	16"w x 38"h Panel
4	1	38"h Connector
5	1	23"w x 38"h Panel w/ Door
6	1	38"h Connector
7	1	16"w x 38"h Panel
8	1	38"h Connector

- Steps:
- 1) Attach panels and connectors together in numerical order. See LT Panel Assembly sheet for instructions. Make sure Velcro is facing inward.
 - 2) Connect Shelf Supports to Velcro on interior of panels, then set shelf on top of supports.
 - 3) Lock counter top onto panels [3] and [7]. See Counter Top Lock detail.
 - 4) Attach graphic to panel [1], using standoffs & screw caps.

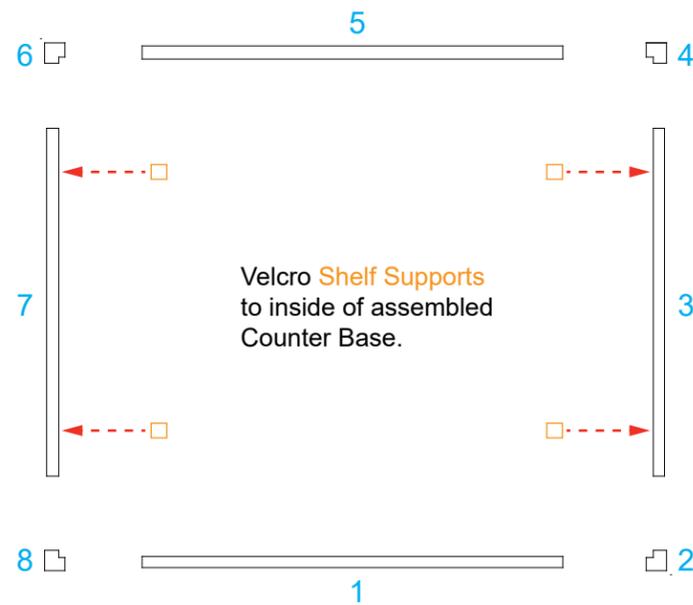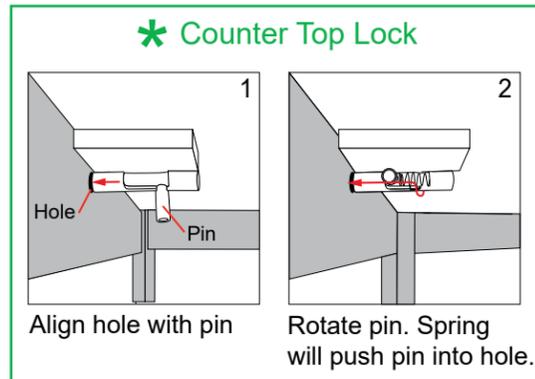

Top View of Counter Base Assembly

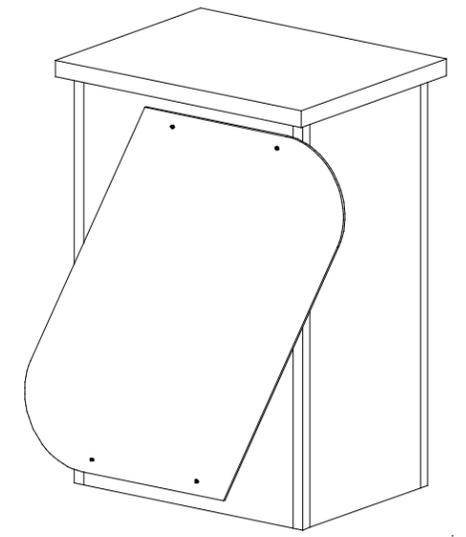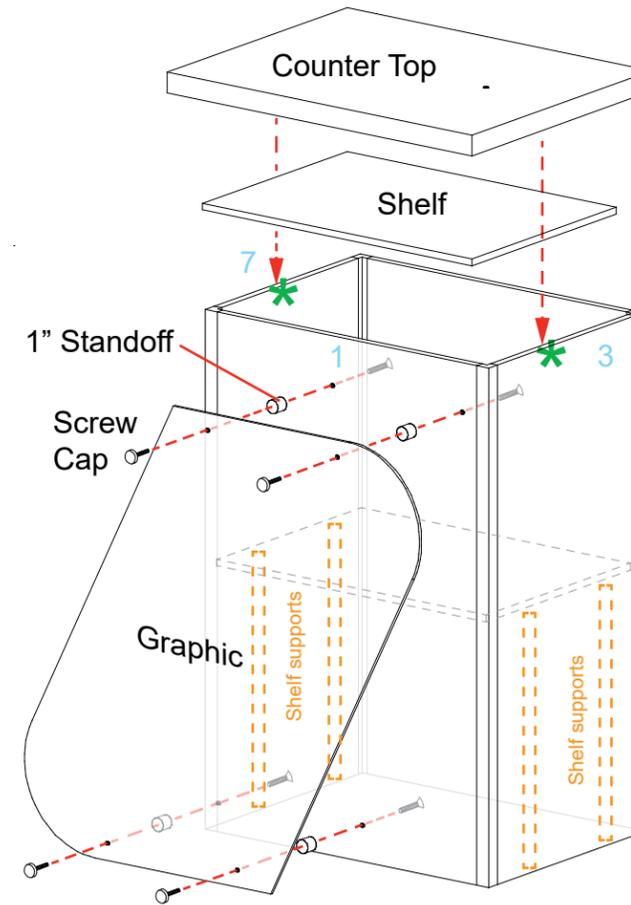

Completed Assembly