







Item	Qty.	Description
1	4	38" GS220 Corner Extrusion
2,2A	1,1	57.381" Z45 Curved Horizontal Extrusion
3,3A	1,1	68.449" Z45 Curved Horizontal Extrusion
4,4A	2,2	13.5" Z45 Horizontal Extrusion
5	1	34.418" Z45 Vertical Extrusion
6	1	34.418" Z45 Vertical Extrusion

**Steps:**

- 1) Attach lower extrusions [2] [3] and [4] between verticals [1].
- 2) Attach verticals [5] and [6] to lower extrusion [2], with door between.
- 3) Insert infills between verticals [1] [5] and [6], making sure Velcro is facing inward.
- 4) Connect door to vertical [6]. See [Door Connection](#) detail.
- 5) Attach upper extrusions [2A] [3A] and [4A] between verticals [1], to secure infills.
- 6) Attach shelf supports to Velcro on inside of assembled counter then place shelf on top of supports.
- 8) Place counter top on assembled counter base. See [Counter Top Lock](#) detail.

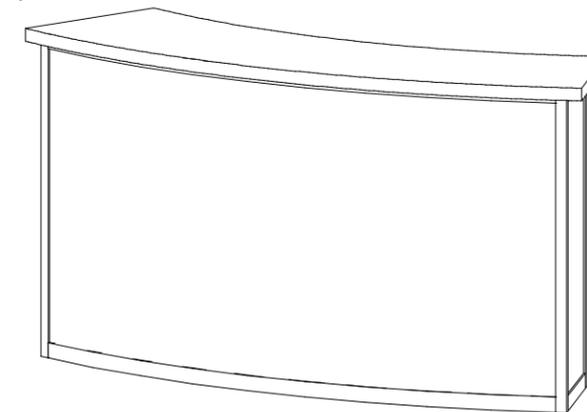

Completed Counter Assembly

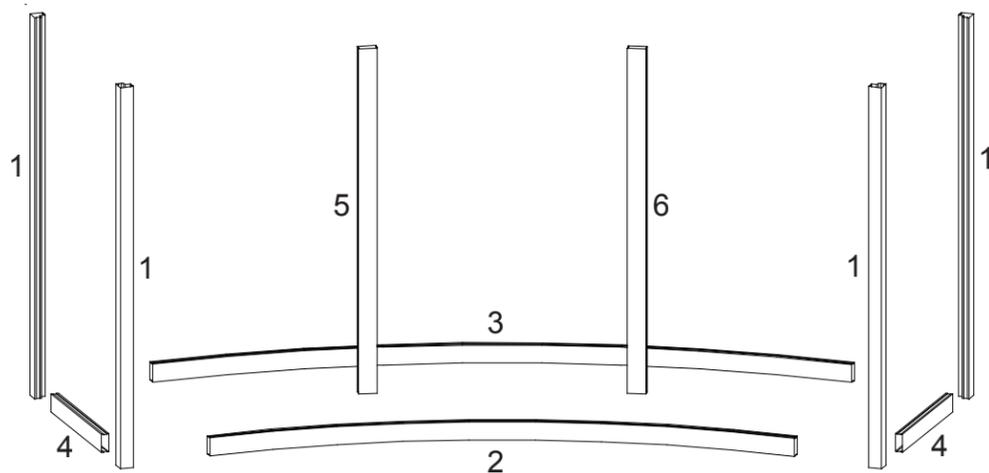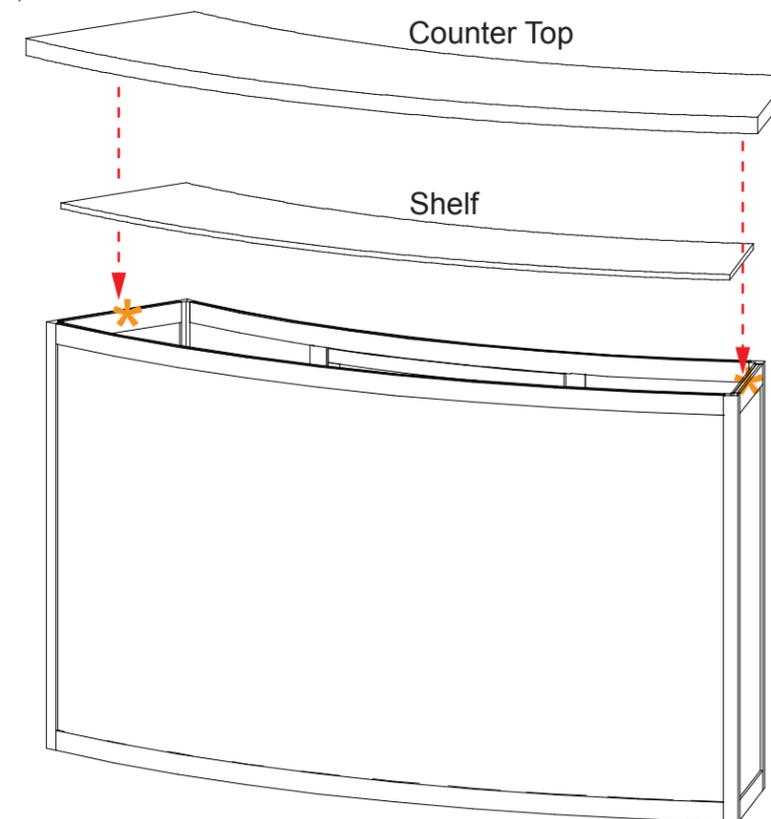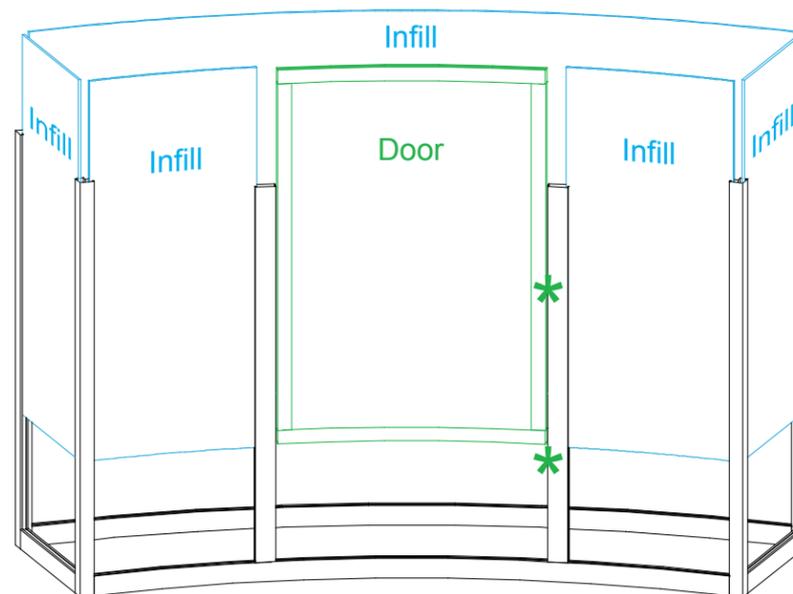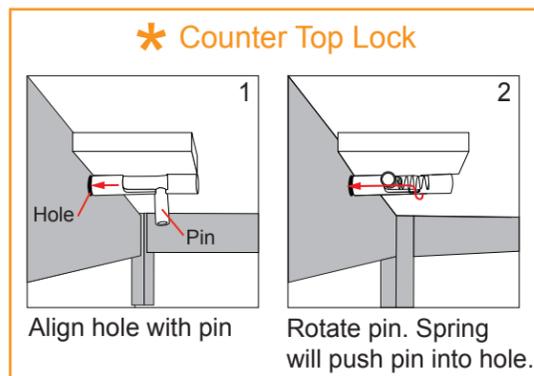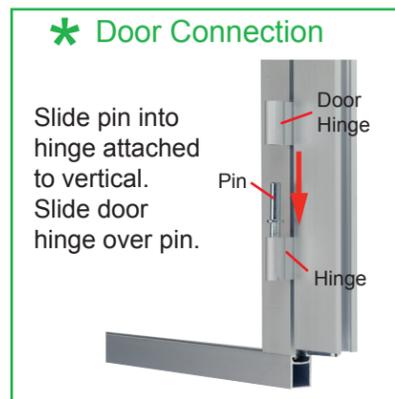

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.  
**Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly

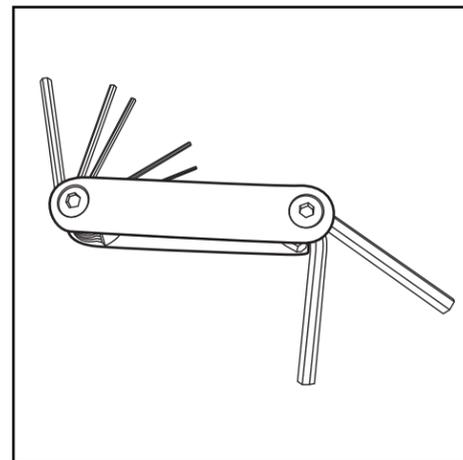


Hex Tool - Essential for Assembly

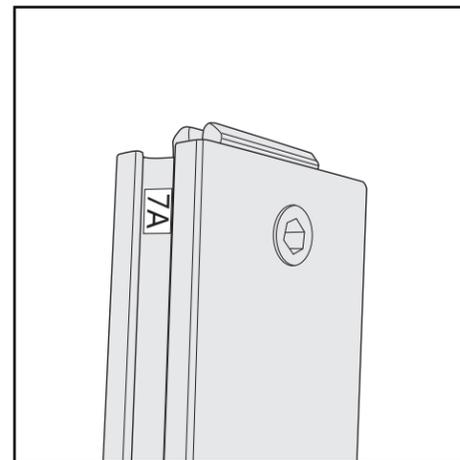


Part Identification - Numbering

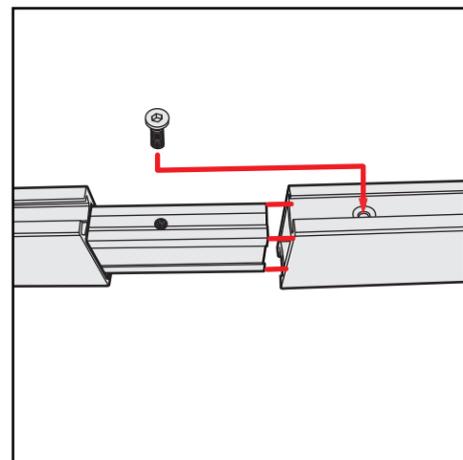


Spline Connection

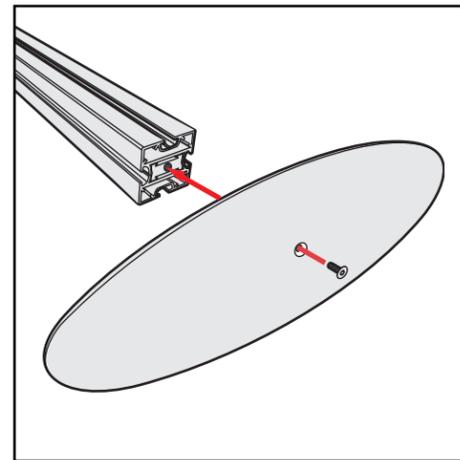

Base Plate & Extrusion Connection

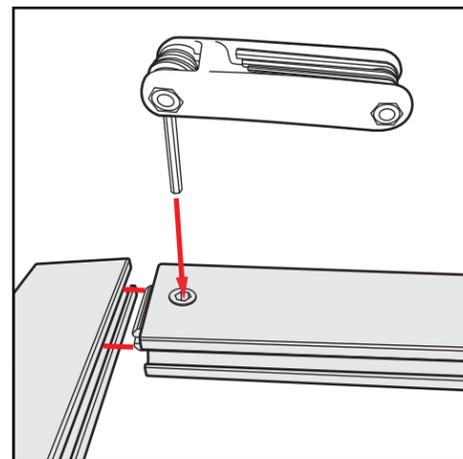

Extrusion & Lock Connection

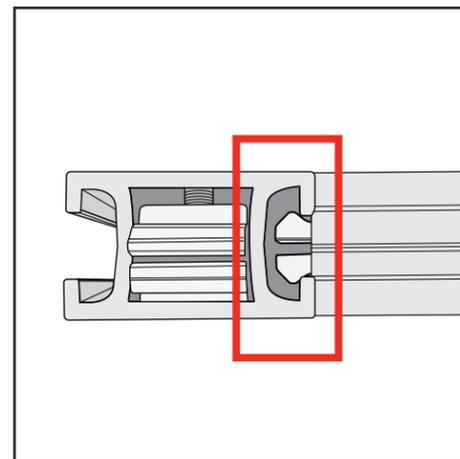

Engaged Lock



**WARNING**



DO NOT USE POWER TOOLS



LADDERS OR LIFTS  
MAY BE REQUIRED



ALL CONNECTIONS MUST  
BE TIGHTLY SECURED