

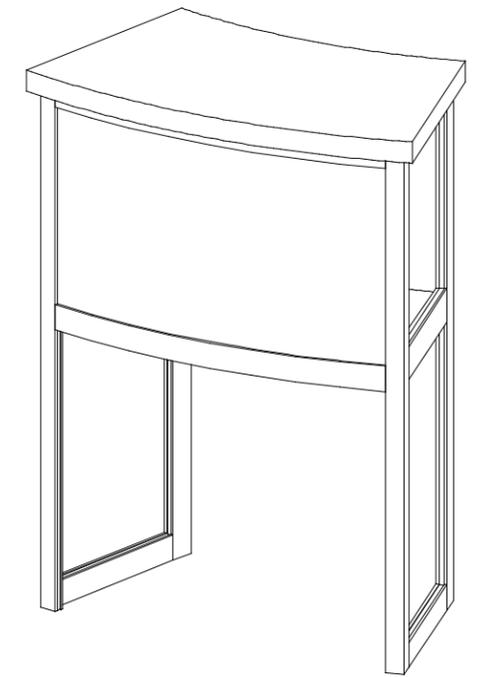
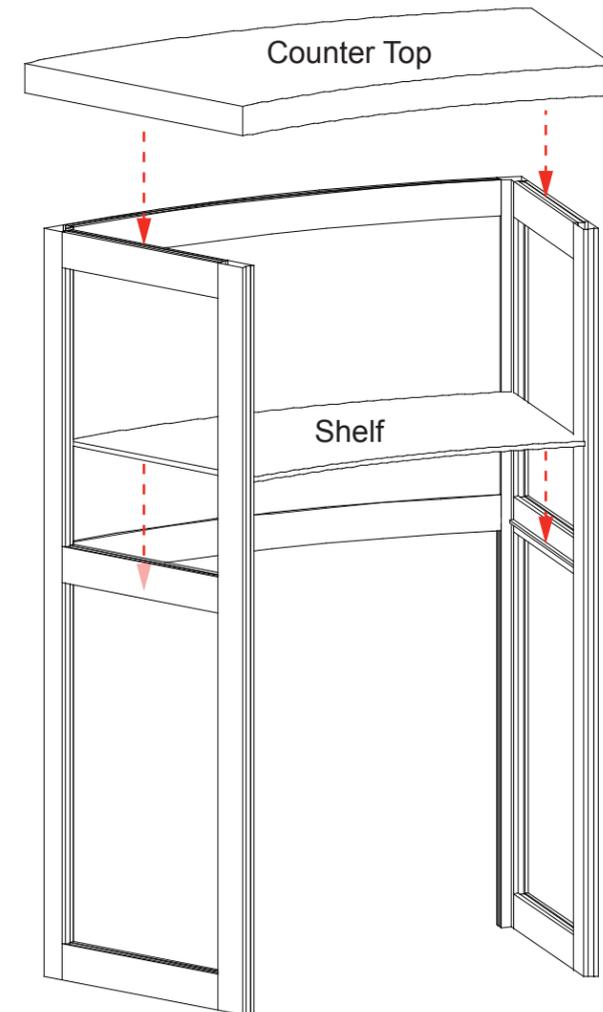
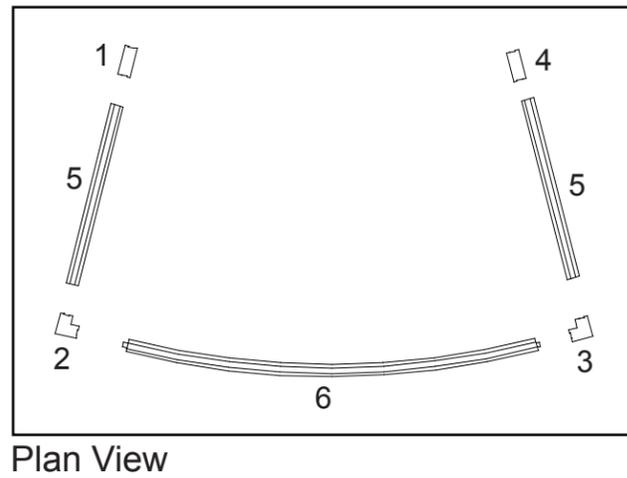


Item	Qty	Description
1	1	37.5”h Vertical Extrusion
2	1	37.5”h Corner Extrusion
3	1	37.5”h Corner Extrusion
4	1	37.5”h Vertical Extrusion
5/5A	4/2	11”w Horizontal Extrusion
6/6A	1/1	24.875”w Horizontal Extrusion

- Steps**
- 1) Attach horizontal extrusions [5] and [5A] between extrusions [1 and 2] [3 and 4].
 - 2) Attach curved horizontal extrusions [6] and [6A] between extrusions [2] and [3], with **Insert** between.
 - 3) Place shelf onto lips of extrusions [5A].
See **Extrusion Lip** detail.
 - 4) Set counter top on top of assembled base.

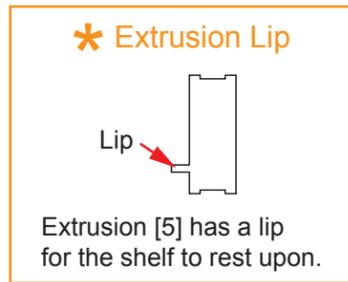

Completed Assembly

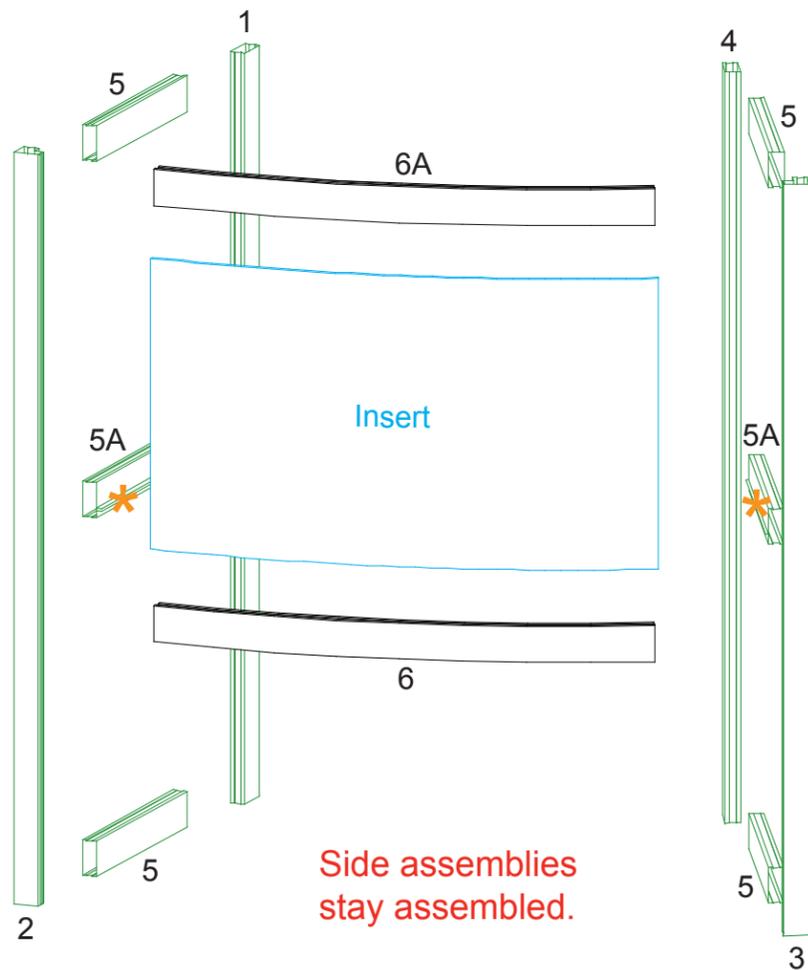

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

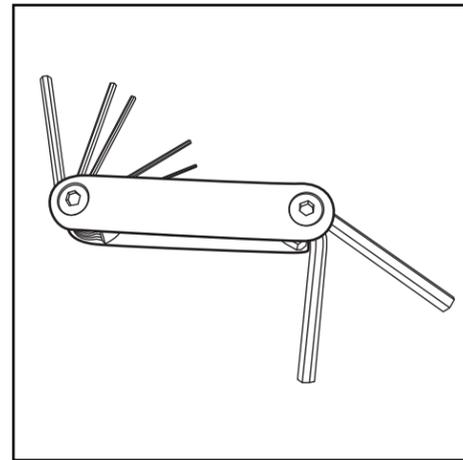


Hex Tool - Essential for Assembly

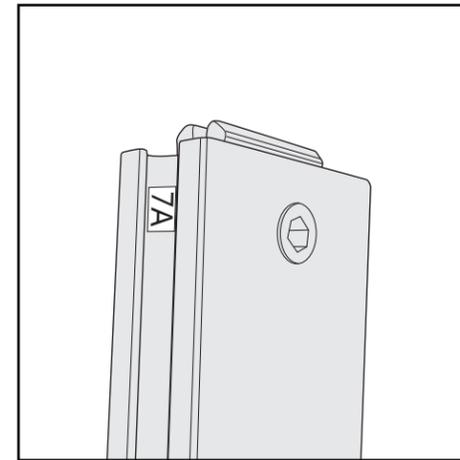


Part Identification - Numbering

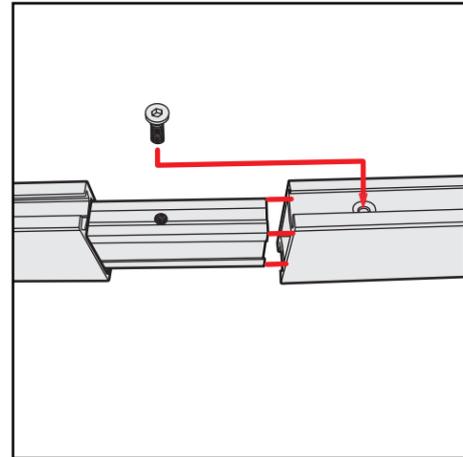


Spline Connection

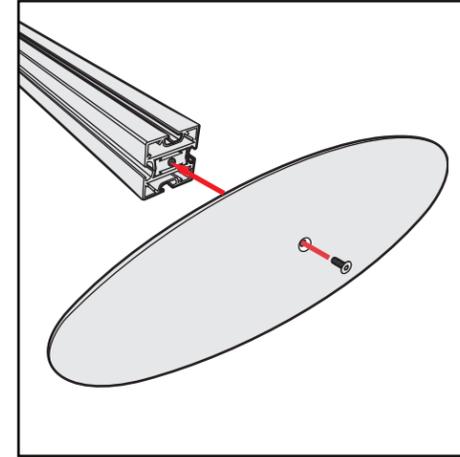

Base Plate & Extrusion Connection

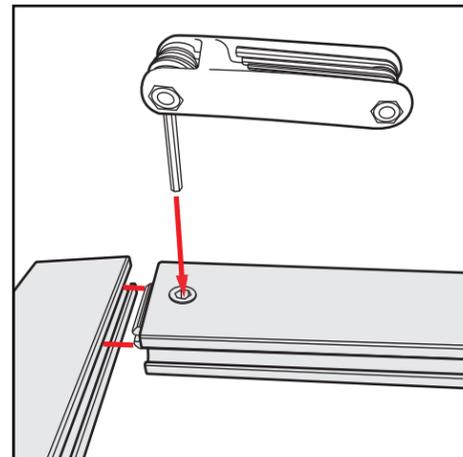

Extrusion & Lock Connection

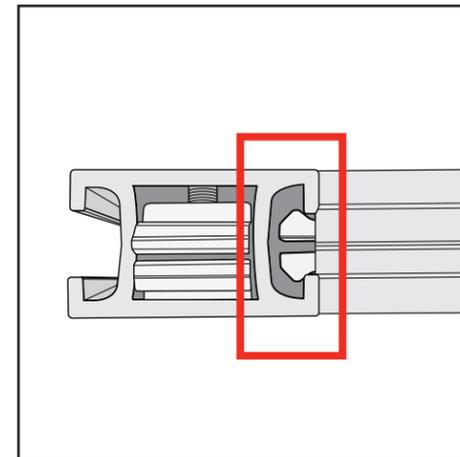

Engaged Lock



WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED

Top View of Each Level

